


PANIC BARS

The complete range of Savio panic bars

Tested according to EN 1125:2008
Antibacterial protection
Compact design
Grinz finish



Juvarra and Brunelleschi

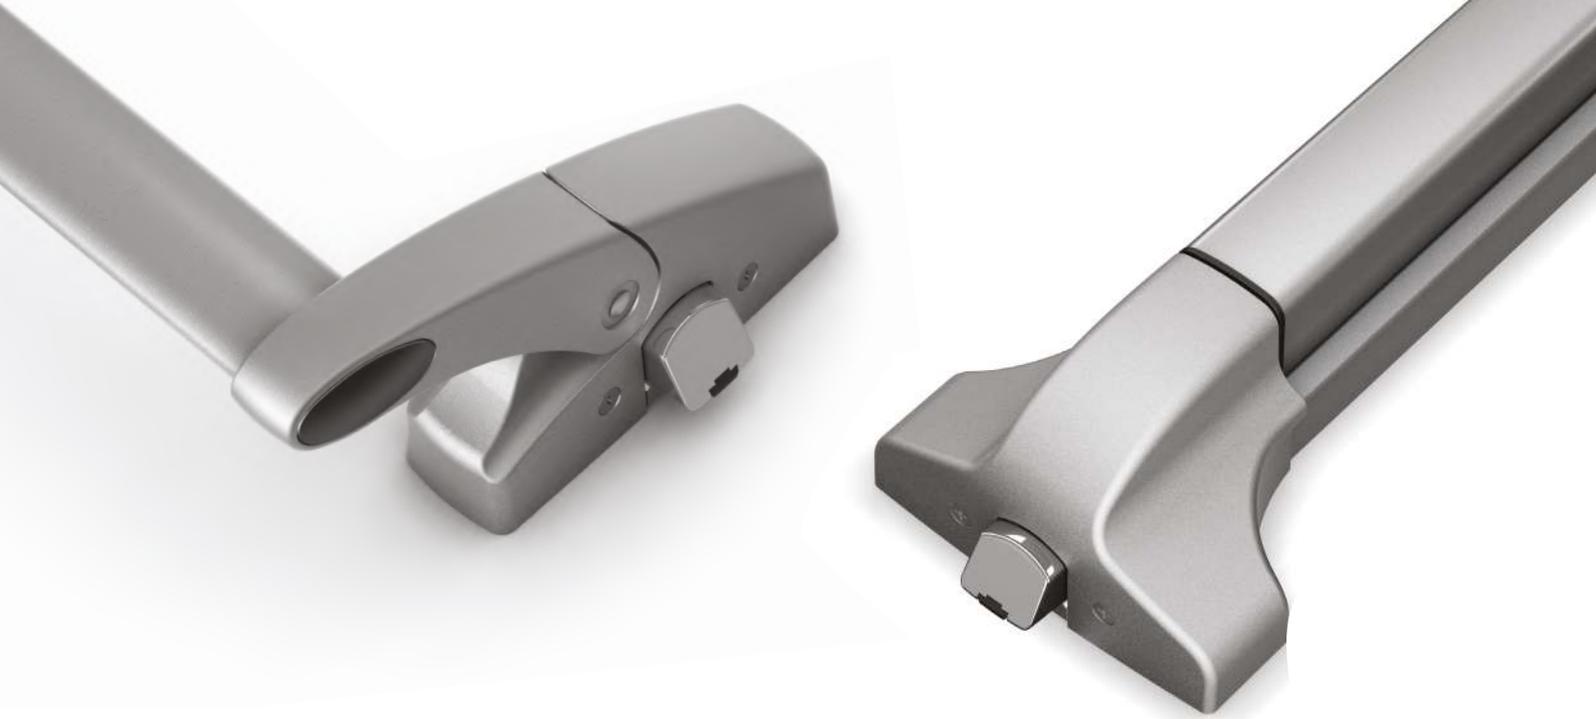

Certified durability

Juvarra and Brunelleschi have been tested to the highest standards of the EN 1125:2008 regulation, successfully passing the 200,000-cycle test and exceeding 500,000 cycles.

Anti-burglary security

Savio wanted to improve security even further with the unique shape of the latch, providing enhanced resistance against break-in attempts.

Opening security: double leaf

The translating plate latch is the solution that completely eliminates any jamming when opening the two leaves. Additionally, thanks to the self-lubricating nylon insert, the effort required for operation is significantly reduced.

Maximum ease in cylinder replacement

Juvarra and Brunelleschi allow for cylinder replacement without the need to disassemble the internal part. This innovation is particularly useful in solutions with master keys or other special systems. The replacement of the supplied cylinder with the permanent one is so simple that it can be performed by the end user.

Functional and sober design

The compact design of the new range of panic bars combines pleasant sobriety with excellent functionality.


Antibacterial safety

Savio extends its focus on security to hygiene as well, with an antibacterial treatment using high-quality paints, essential in public spaces such as schools, hospitals, and offices.

360° safety



Savio's commitment to safety extends to hygiene. These products feature an antibacterial treatment with top-quality paints, essential in public spaces such as schools, hospitals, and offices. Reducing microbes on surfaces is crucial, as some can negatively impact health and the environment in which we live and work.

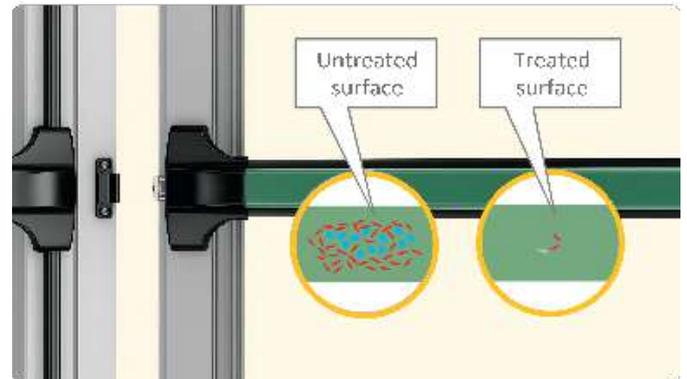

Tested for up to 500.000 cycles

At the laboratory, we tested the accessories of the JUVARRA and BRUNELLESCHI ranges following the specifications of the EN 1125:2008 standard for applications up to 1500 mm in width and up to 3100 mm in height, achieving validation and the inclusion of these codes in the CE Certificate of Conformity (6010.B/1500, 6010.721, and 6110.B/1158). The test reached 200,000 cycles, exceeding the requirements of the standard, and continued up to 500,000 cycles. In previous tests, we reached 2 million cycles, further demonstrating the exceptional durability of our products.

Grinz Finish

The new Grinz finish combines modern elegance with lasting durability. Its granular texture adds a distinctive touch to the panic bar, offering 30% more impact resistance and optimal protection against weather elements. Easy to clean, it also reduces fingerprint marks, making maintenance simple and practical.



Certifications

JUVARRA and BRUNELLESCHI panic bars


JUVARRA and BRUNELLESCHI have been verified according to the EN 1125:2008 standard, as certified in accordance with the EU Construction Products Regulation 305/2011 of the European Parliament and Council, dated March 9, 2011, by the certification institute ICIM, which is authorized at the European level to grant the use of the CE mark for construction products. Its identification number is 0425.




The achievable levels are:

(in bold, the levels of JUVARRA)

3 7 7 0 1 4 2 2 A A

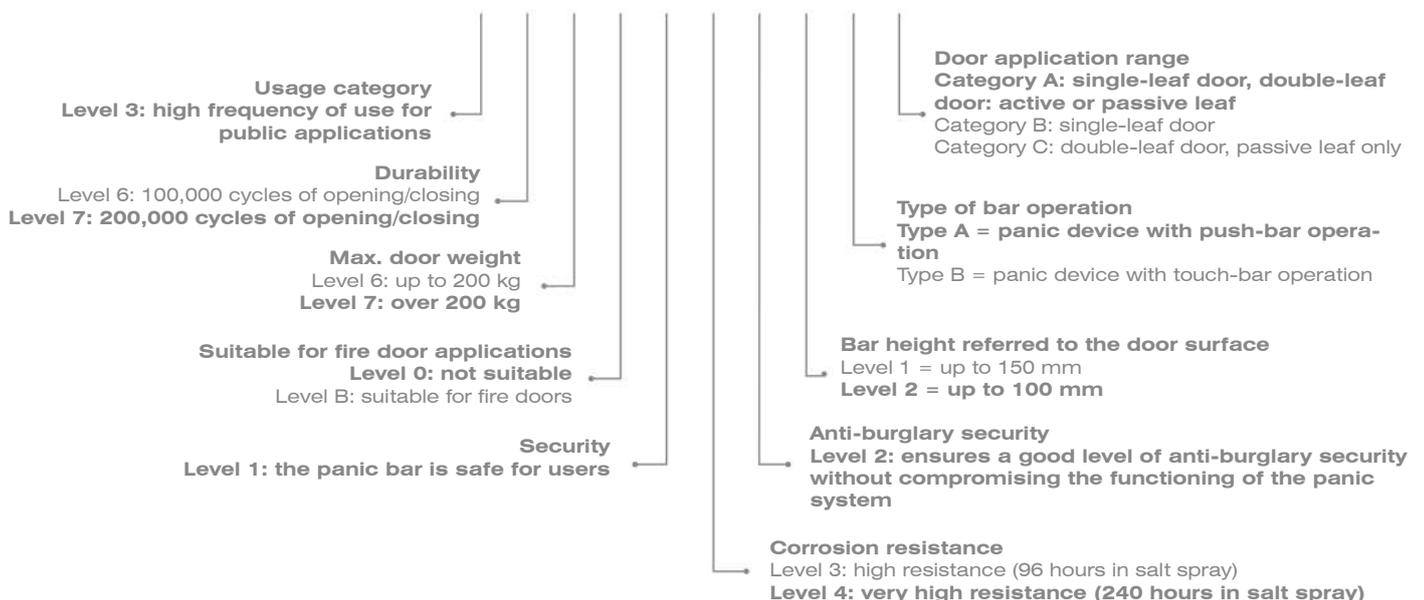


The products listed in the certificate guarantee a high number of utilisation cycles (200,000 cycles), allowing for frequent use. This cyclic performance was achieved on a door weight of 300 kg. These data, along with other important factors for assessing the product's performance level, are outlined below.

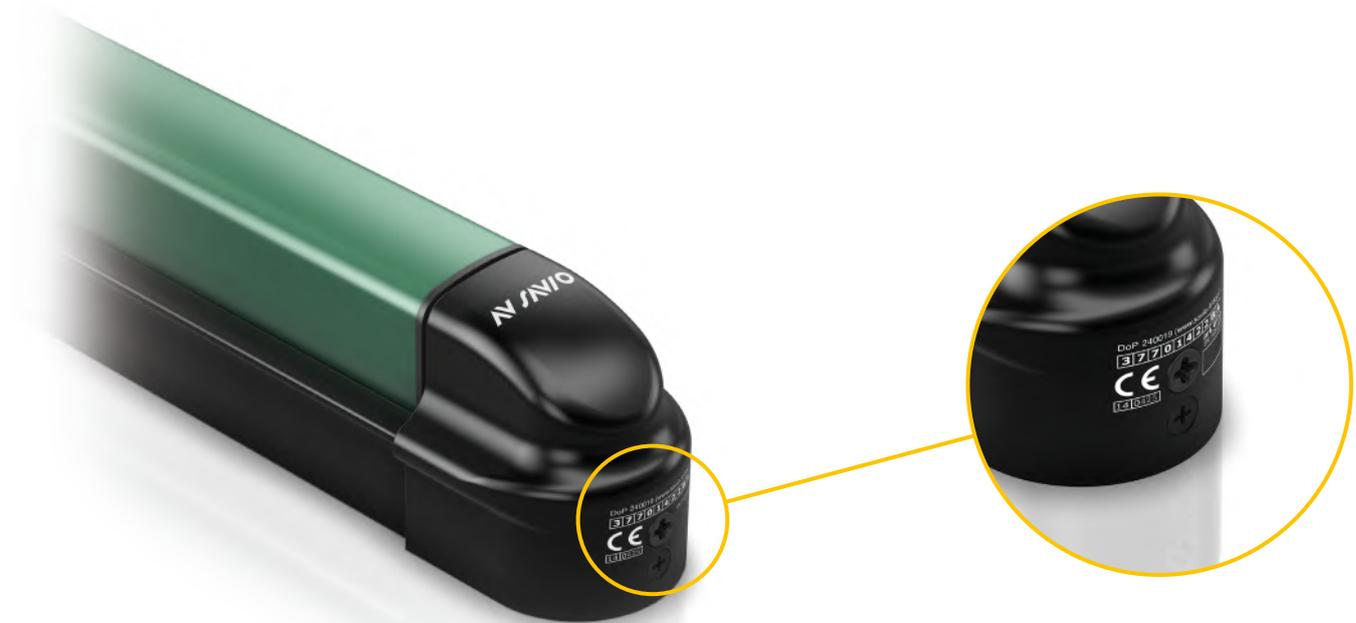

The achievable levels are:
(in bold, the levels of BRUNELLESCHI)


3 7 7 0 1 4 2 2 BA

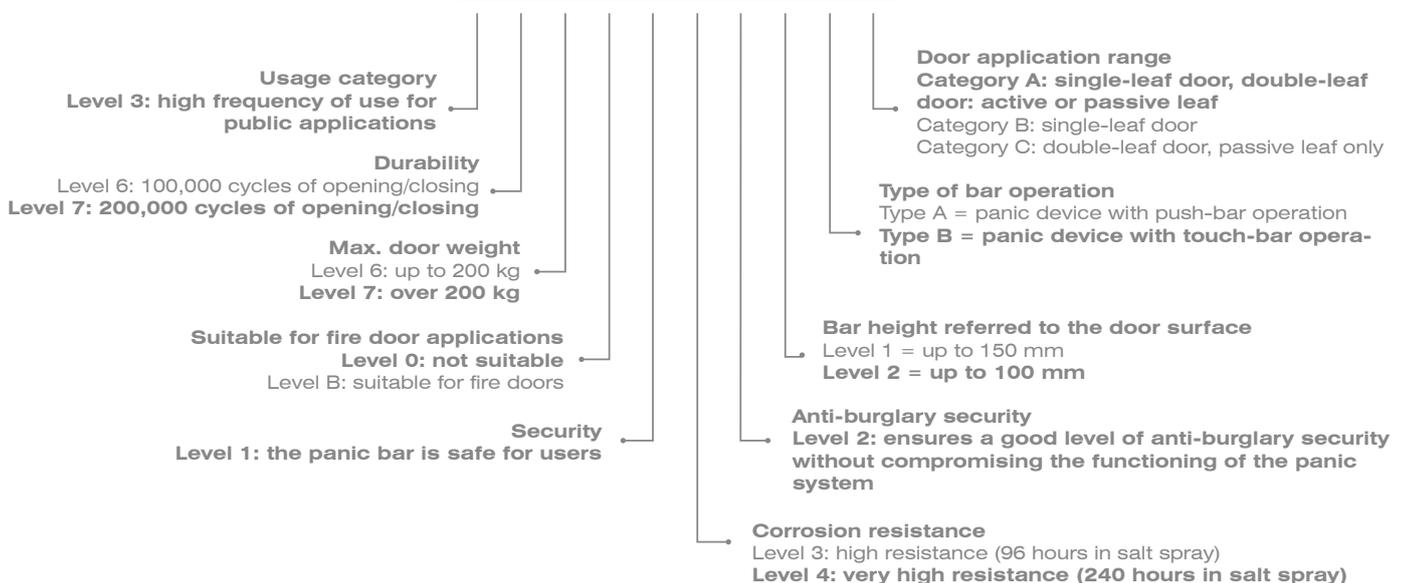


JUVARRA lever panic bar




Horizontal non-handed panic bar with one closing point.

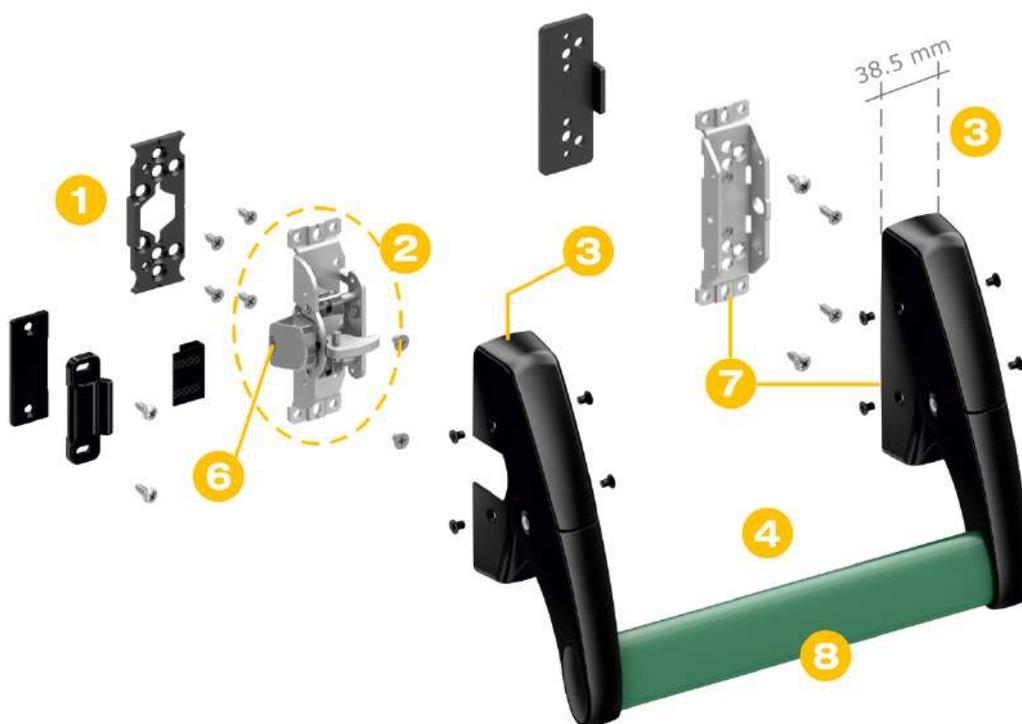

Vertical non-handed panic bar with two closing points.

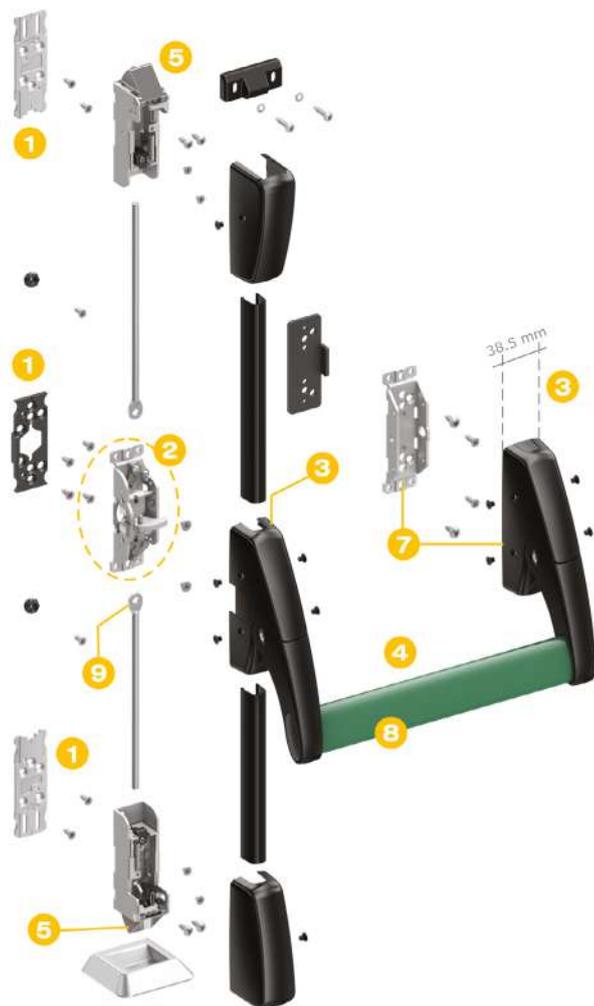

Vertical non-handed panic bar with side closures and three closing points.

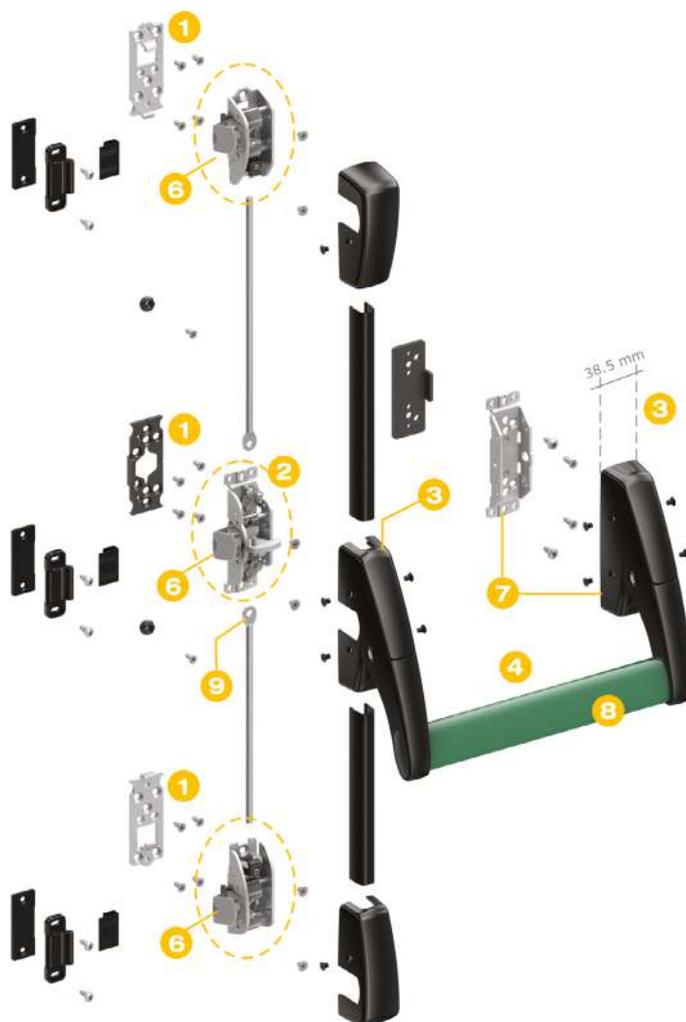


- 1 All supports and latches are screwed onto **steel counter plates** (also weldable) for an easy, solid, and fast fixing
- 2 **Completely non-handed mechanism**
- 3 **Reduced dimensions** (38.5 mm) for assembly on standard profiles
- 4 Wide profile horizontal bars for **better maneuverability**
- 5 **Adjustable high and low latches** with anti-burglary device
- 6 **Flat and translating side latches** (top, bottom, and central)
- 7 Secondary support designed for the insertion of the **day stop device and the microswitch**
- 8 Horizontal bar to be inserted with **wide manufacturing tolerances**; made of steel with a 40 mm oval section
- 9 **Simplified rod coupling**


BRUNELLESCHI push panic bar



Horizontal non-handed panic bar with one closing point.

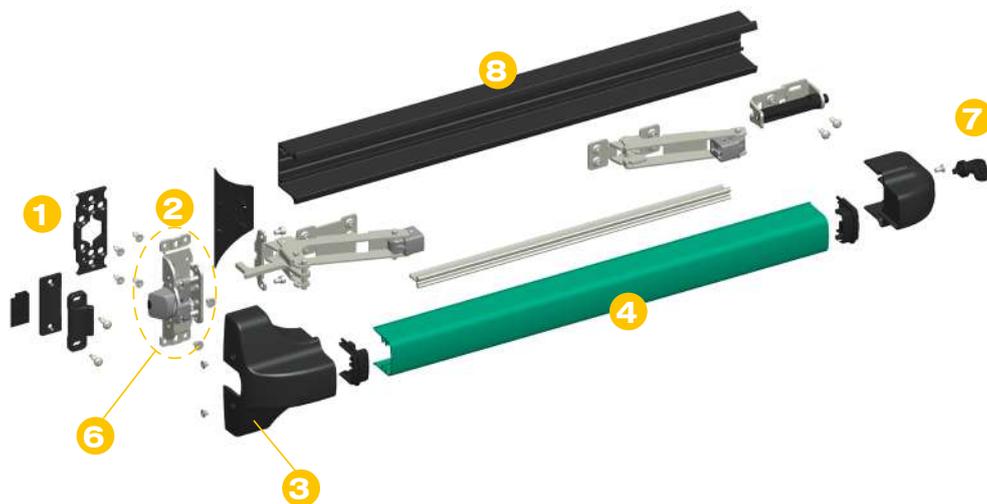


Vertical non-handed panic bar with two closing points.

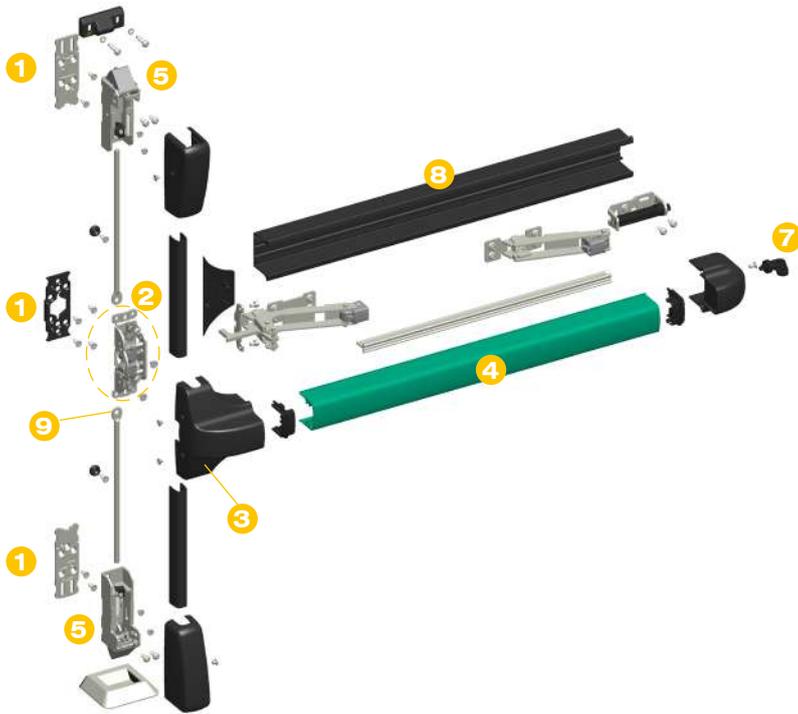


Vertical non-handed panic bar with side closures and three closing points.


- 1 All supports and latches are screwed onto steel counter plates (also weldable) for an easy, solid, and fast fixing
- 2 Completely non-handed mechanism
- 3 Reduced dimensions (38.5 mm) for assembly on standard profiles
- 4 Antibacterial silver ion protection
- 5 Adjustable high and low latches with anti-burglary device
- 6 Flat and translating side latches (top, bottom, and central)
- 7 Day stop device always included in the standard product
- 8 Base profile with a special shape for excellent grip
- 9 Simplified rod coupling

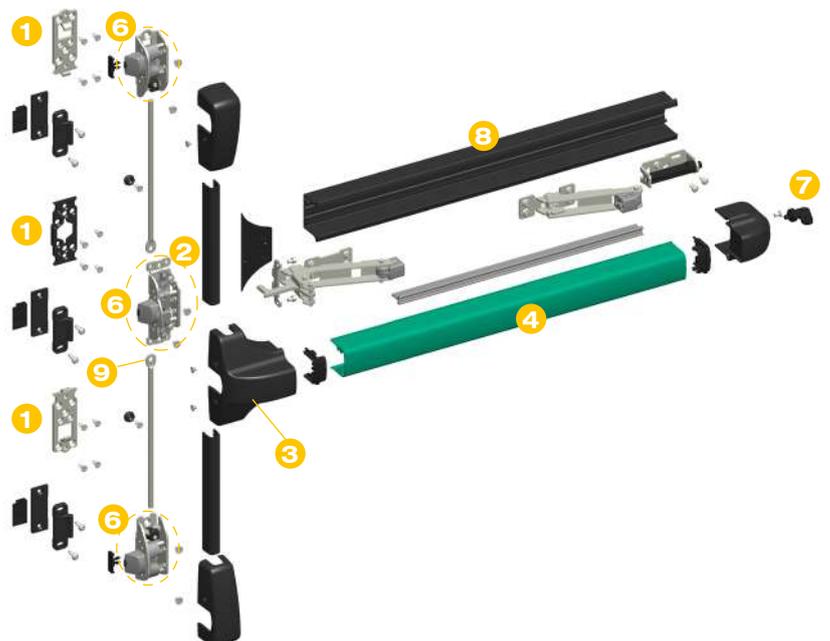

JUVARRA complete kits

| | Article | Description | Pcs. | Finishes |
|---|-------------|---|------|--------------------------------|
|  | 6010.1/1200 | JUVARRA (patented) Horizontal non-handed panic bar with a single closing point, push-bar version. | 1 | GR 301, GR 629, GREY, XVM, XVS |
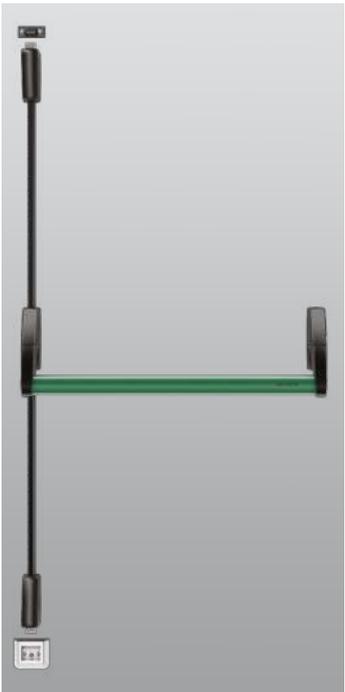
| | Article | Description | Pcs. | Finishes |
|--|-------------|---|------|--------------------------------|
|  | 6010.2/1200 | JUVARRA (patented) Vertical non-handed panic bar with 2 closing points, push-bar version. | 1 | GR 301, GR 629, GREY, XVM, XVS |

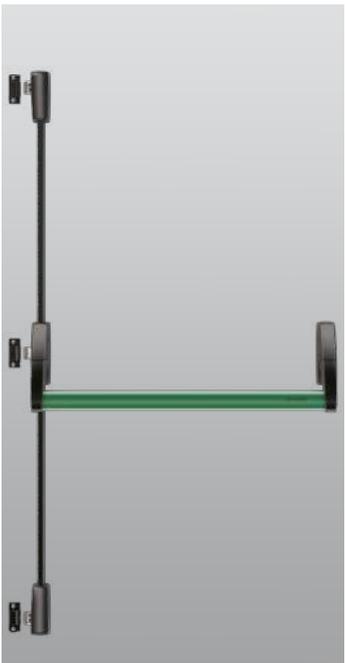
| | Article | Description | Pcs. | Finishes |
|---|-------------|---|------|--------------------------------|
|  | 6010.3/1200 | JUVARRA (patented) Vertical non-handed panic bar with 3 closing points, push-bar version. | 1 | GR 301, GR 629, GREY, XVM, XVS |

JUVARRA and BRUNELLESCHI modular items

|  | Article | Description | Pcs. | Finishes |
|---|----------|--|------|------------------------|
| | 6010.701 | JUVARRA (patented) Horizontal non-handed support kit with 1 closing point, push-bar version. | 1 | 910, GR 905, GREY, SLV |


|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|------------------------|
| | 6010.702 | JUVARRA (patented) Vertical non-handed support kit with 2 closing points, push-bar version. | 1 | 910, GR 905, GREY, SLV |

|  | Article | Description | Pcs. | Finishes |
|--|----------|--|------|------------------------|
| | 6010.703 | JUVARRA (patented) Non-handed support kit with 3 closing points, push-bar version. | 1 | 910, GR 905, GREY, SLV |

|  | Article | Description | Pcs. | Finishes |
|---|-------------|----------------------------|------|--|
| | 6010.B/860 | Horizontal bar of 860 mm. | 1 | 910, GR 301, GR 629, GR 905, GREY, SLV, XVM, XVS |
| | 6010.B/1200 | Horizontal bar of 1200 mm. | 1 | |
| | 6010.B/1500 | Horizontal bar of 1500 mm. | 1 | |

|  | Article | Description | Pcs. | Finishes |
|---|---------------|--|------|------------------|
| | 6110.712/1200 | BRUNELLESCHI (patented) Vertical non-handed support kit with 2 closing points, without touch bar, without rods, and without upper and lower bolt latches. For doors with a clear width from 1220 mm and a max height of 2450 mm. | 1 | 910, GR 905, SLV |
| | 6110.712/1500 | BRUNELLESCHI (patented) Vertical non-handed support kit with 2 closing points, without touch bar, without rods, and without upper and lower bolt latches. For doors with a clear width from 1520 mm. | 1 | |

BRUNELLESCHI modular items

| | Article | Description | Pcs. | Finishes |
|---|---------------|---|------|--|
|  | 6110.713/1200 | BRUNELLESCHI (patented) Non-handed support kit for single/multiple closures, without touch bar, without rods, and without lateral latches. For doors with a clear width from 1220 mm and a max height of 2450 mm. | 1 | 910, GR 905, SLV |
| | 6110.713/1500 | BRUNELLESCHI (patented) Non-handed support kit for single/multiple closures, without touch bar, without rods, and without lateral latches. For doors with a clear width from 1520 mm. | 1 | |
| | Article | Description | Pcs. | Finishes |
|  | 6110.B/1058 | Horizontal bar of 1058 mm for items 6110.712/1200 and 6110.713/1200. For doors with a clear width from 437 to 1220 mm. | 1 | 910, GR 301, GR 629, GR 905, SLV, XVM, XVS |
| | 6110.B/1358 | Horizontal bar of 1358 mm for items 6110.712/1500 and 6110.713/1500. For doors with a clear width from 437 to 1520 mm (also available in XSD finish). | 1 | |

JUVARRA and BRUNELLESCHI modular items

| | Article | Description | Pcs. | Finishes |
|---|----------|--|------|------------------------|
|  | 6010.720 | Standard vertical rods for doors up to 2450 mm in height. | 1 | 910, GR 905, GREY, SLV |
|  | 6010.721 | Vertical rods for doors with a height from 2450 mm to 3100 mm. | 1 | 910, GR 905, GREY, SLV |
| | Article | Description | Pcs. | Finishes |
|  | 6010.730 | (Patented) Kit high-low latch bolts. | 1 | 910, GR 905, GREY, SLV |

JUVARRA and BRUNELLESCHI modular items

|  | Article | Description | Pcs. | Finishes |
|---|-----------|---|------|------------------------|
| | 6010.735R | (Patented) Right-hand high-lateral kit latch bolts. | 1 | 910, GR 905, GREY, SLV |
| | 6010.735L | As 6010.735R, but for left-hand side. | 1 | |
|  | Article | Description | Pcs. | Finishes |
| | 6010.740 | (Patented) Kit lateral latch bolts. | 1 | 910, GR 905, GREY, SLV |


External access

|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|------------------------|
| | 6010.870 | External access device, handle only. | 1 | 910, GR 905, GREY, SLV |
|  | Article | Description | Pcs. | Finishes |
| | 6010.873 | External access device, idle position, cylinder with different key combinations, 3 keys. | 1 | 910, GR 905, GREY, SLV |
| | 6010.874 | Like 6010.873 but with a single key combination. | 1 | |
|  | Article | Description | Pcs. | Finishes |
| | 6010.875 | External access device, idle position, European profile cylinder with different key combinations, 3 keys. Equipped with cylinder unlocked key retention device. | 1 | 910, GR 905, GREY, SLV |
| | 6010.877 | Like 6010.875 but with a single combination. | 1 | |

External access


| | | | | |
|---|--------------------------------|---|----------------------|---|
|  | <p>Article</p> <p>6010.876</p> | <p>Description</p> <p>External access device, idle position. Equipped with cylinder unlocked key retention device.</p> | <p>Pcs.</p> <p>1</p> | <p>Finishes</p> <p>910, GR 905, GREY, SLV</p> |
|  | <p>Article</p> <p>6000.879</p> | <p>Description</p> <p>External access device, reduced size handle. Equipped with cylinder unlocked key retention device. To be used with cam part no. 6010.401.</p> | <p>Pcs.</p> <p>1</p> | <p>Finishes</p> <p>GR 905</p> |
|  | <p>Article</p> <p>6000.880</p> | <p>Description</p> <p>External access device fixed knob handle. Preferably to be paired with the 1 closing point version. To be used with cam part no. 6010.401.</p> | <p>Pcs.</p> <p>1</p> | <p>Finishes</p> <p>910, GR 905, GREY, SLV</p> |
|  | <p>Article</p> <p>6010.890</p> | <p>Description</p> <p>Electrical external access device, idle position. To be used with the cam part no. 6010.401.</p> | <p>Pcs.</p> <p>1</p> | <p>Finishes</p> <p>90BI, 90GR, 90NE</p> |

JUVARRA and BRUNELLESCHI complementary accessories

|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|------------------------|
| | 6010.401 | Brass cam to use the external access device art. 6000.879/.880 - 6010.890 with JUVARRA/BRUNELLESCHI panic bars. | 5 | |
|  | Article | Description | Pcs. | Finishes |
| | 6010.424 | Shimming plate for the main and secondary support of JUVARRA (art. 6010.1). To be used with the electric strikeart. 6010.820/.824. | 5 | GR 905, SLV |
|  | Article | Description | Pcs. | Finishes |
| | 6010.800 | Kit consisting of: 4 spacers (1 mm, 2 mm, and 2 pcs of 4 mm) in black or white nylon. To be paired with the keeper art. 6010.801. | 5 | .74, .78 |
|  | Article | Description | Pcs. | Finishes |
| | 6010.801 | Kit for horizontal or lateral closures. For applications on PVC profiles. | 5 | 910, GR 905, GREY, SLV |
|  | Article | Description | Pcs. | Finishes |
| | 6010.805 | Kit consisting of 1 keeper in painted steel ferrogliere for horizontal and vertical closings. For applications on frame profiles. | 20 | 910, GR 905, GREY, SLV |
|  | Article | Description | Pcs. | Finishes |
| | 6010.811 | Kit for horizontal or lateral closures. | 5 | 910, GR 905, GREY, SLV |
|  | Article | Description | Pcs. | Finishes |
| | 6010.812 | Kit for upper vertical closure. | 5 | 910, GR 905, GREY, SLV |

JUVARRA and BRUNELLESCHI complementary accessories

| | Article | Description | Pcs. | Finishes |
|---|----------|---|------|------------------------|
|  | 6010.820 | Electric strike for profiles with rebate. Powered at 12 V CC. | 1 | 910, GR 905, GREY, SLV |

| | Article | Description | Pcs. | Finishes |
|---|----------|---|------|------------------------|
|  | 6010.824 | Electric strike for profiles with rebate. Powered at 12 V CC. | 1 | 910, GR 905, GREY, SLV |

| | Article | Description | Pcs. | Finishes |
|---|----------|--|------|----------|
|  | 6010.830 | Hold-open device for JUVARRA panic bars. | 5 | GR 905 |


| | Article | Description | Pcs. | Finishes |
|---|----------|-------------------------------------|------|----------|
|  | 6010.842 | Microswitch for JUVARRA panic bars. | 5 | |

| | Article | Description | Pcs. | Finishes |
|---|----------|--|------|----------|
|  | 6110.842 | Microswitch for BRUNELLESCHI panic bars. | 5 | |




JUVARRA Product codes necessary for the various combinable configurations

Diagram for a single point closure

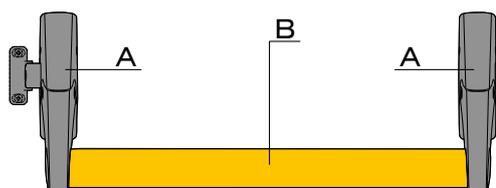

| Ref. | Leaf width | Article |
|------|------------|---------------|
| A | < 900 mm | 6010.701 |
| B | | + 6010.B/860 |
| A | < 1240 mm | 6010.701 |
| B | | + 6010.B/1200 |
| A | < 1540 mm | 6010.701 |
| B | | + 6010.B/1500 |


Diagram for two point closure

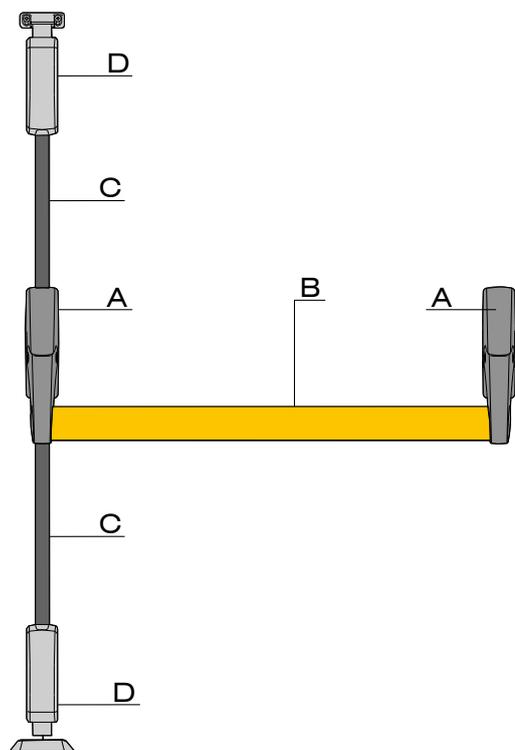

| Ref. | Leaf width | H up to 2450 | H up to 3100 |
|------|------------|---------------|---------------|
| A | < 900 mm | 6010.702 | 6010.702 |
| B | | + 6010.B/860 | + 6010.B/860 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.730 | + 6010.730 |
| A | < 1240 mm | 6010.702 | 6010.702 |
| B | | + 6010.B/1200 | + 6010.B/1200 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.730 | + 6010.730 |
| A | < 1540 mm | 6010.702 | 6010.702 |
| B | | + 6010.B/1500 | + 6010.B/1500 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.730 | + 6010.730 |


JUVARRA Product codes required for various configurable setups

Diagram for three point closure

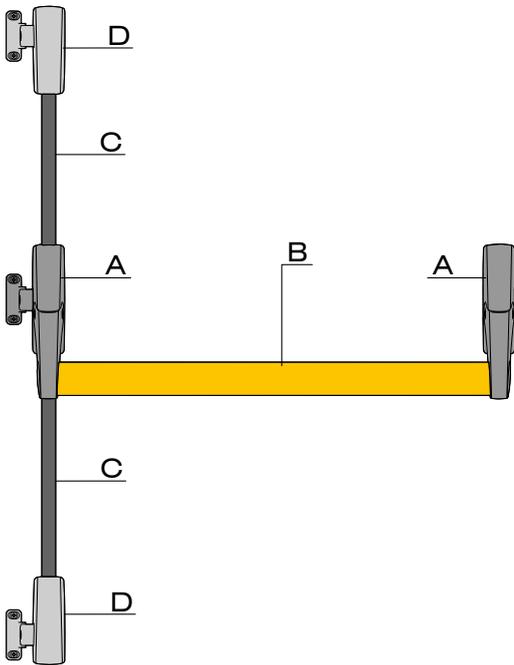

| Ref. | Leaf width | H up to 2450 | H up to 3100 |
|------|------------|---------------|---------------|
| A | < 900 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/860 | + 6010.B/860 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.740 | + 6010.740 |
| A | < 1240 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/1200 | + 6010.B/1200 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.740 | + 6010.740 |
| A | < 1540 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/1500 | + 6010.B/1500 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.740 | + 6010.740 |


Diagram for three point closure top/side

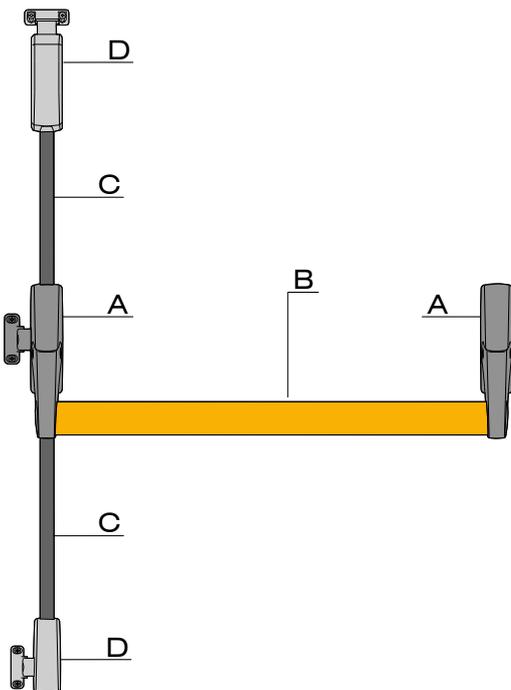

| Ref. | Leaf width | H up to 2450 | H up to 3100 |
|------|------------|---------------|---------------|
| A | < 900 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/860 | + 6010.B/860 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.735R/L | + 6010.735R/L |
| A | < 1240 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/1200 | + 6010.B/1200 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.735R/L | + 6010.735R/L |
| A | < 1540 mm | 6010.703 | 6010.703 |
| B | | + 6010.B/1500 | + 6010.B/1500 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.735R/L | + 6010.735R/L |


BRUNELLESCHI Product codes required for various configurable setups

Diagram for a single point closure

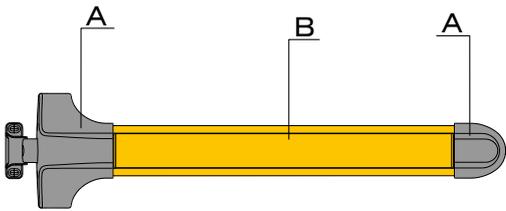

| Ref. | Passage width | Article |
|------|---------------|---------------|
| A | 437 - 1220 mm | 6110.713/1200 |
| B | | 6110.B/1058 |
| A | 437 - 1520 mm | 6110.713/1500 |
| B | | 6110.B/1358 |


Diagram for two-point top/bottom closure

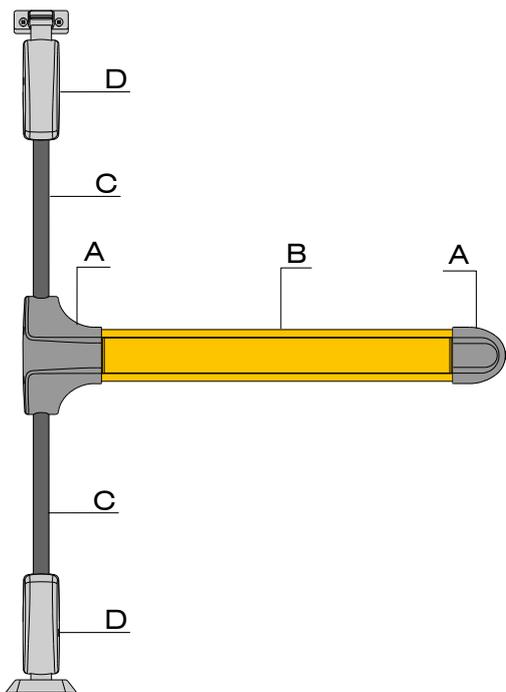

| Ref. | Passage width | H up to 2450 | H up to 3100 |
|------|---------------|---------------|---------------|
| A | 437 - 1220 mm | 6110.712/1200 | 6110.712/1200 |
| B | | +6110.B/1058 | +6110.B/1058 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.730 | + 6010.730 |
| A | 437 - 1520 mm | 6110.712/1500 | 6110.712/1500 |
| B | | + 6110.B/1358 | + 6110.B/1358 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.730 | + 6010.730 |


BRUNELLESCHI Product codes necessary for various configurable setups

Diagram for three-point lateral closure

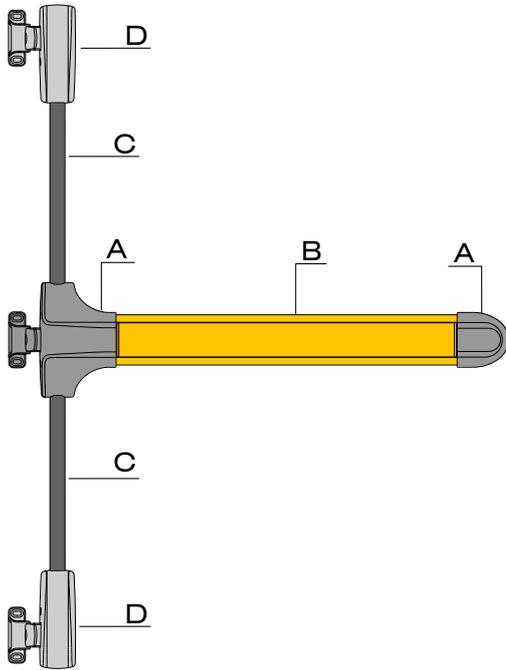

| Ref. | Passage width | H up to 2450 | H up to 3100 |
|------|---------------|---------------|---------------|
| A | 437 - 1220 mm | 6110.713/1200 | 6110.713/1200 |
| B | | +6110.B/1058 | +6110.B/1058 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.740 | + 6010.740 |
| A | 437 - 1520 mm | 6110.713/1500 | 6110.713/1500 |
| B | | + 6110.B/1358 | + 6110.B/1358 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.740 | + 6010.740 |





Diagram for three-point top/lateral closure

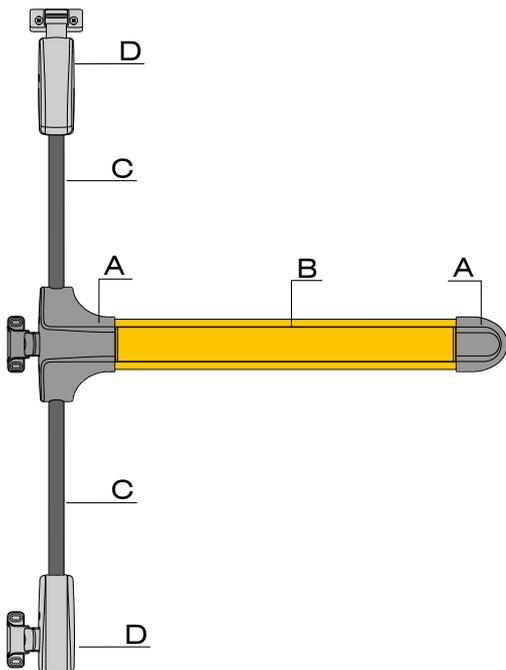





| Ref. | Passage width | H up to 2450 | H up to 3100 |
|------|---------------|---------------|---------------|
| A | 437 - 1220 mm | 6110.713/1220 | 6110.713/1220 |
| B | | +6110.B/1058 | +6110.B/1058 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.735R/L | + 6010.735R/L |
| A | 437 - 1520 mm | 6110.713/1500 | 6110.713/1500 |
| B | | + 6110.B/1358 | + 6110.B/1358 |
| C | | + 6010.720 | + 6010.721 |
| D | | + 6010.735R/L | + 6010.735R/L |

Complete kits JUVARRA





6010.1/1200

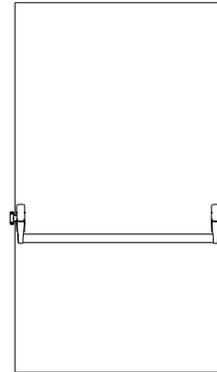

6010.2/1200

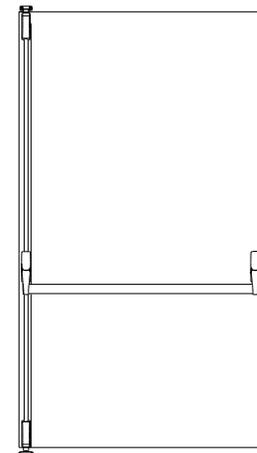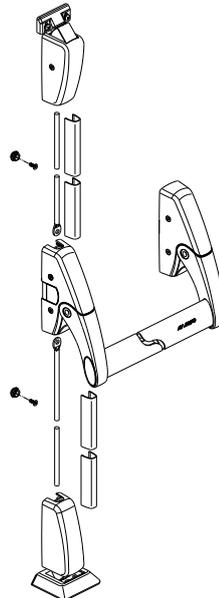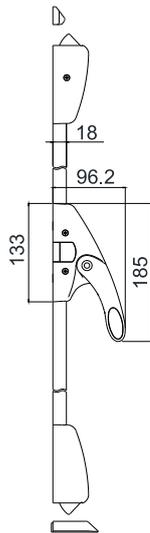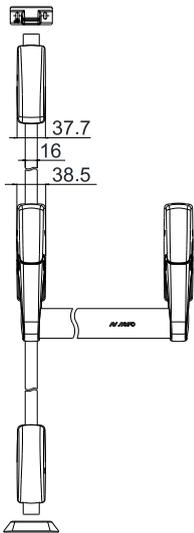


6010.3/1200

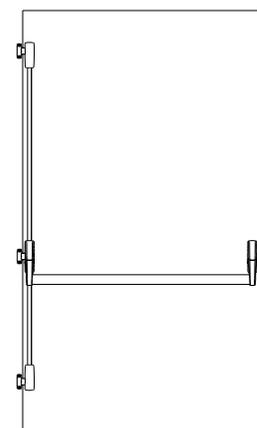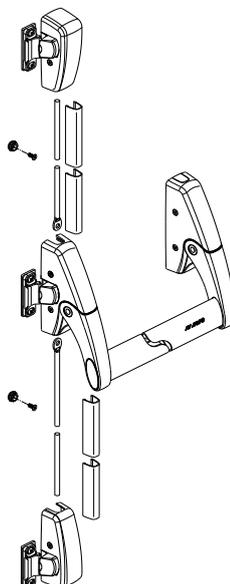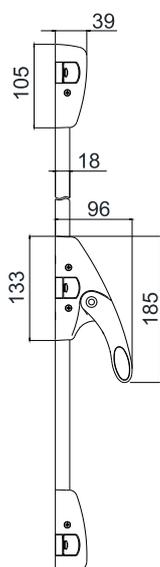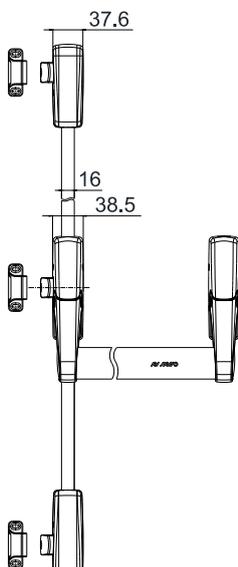


Modular items


6010.701

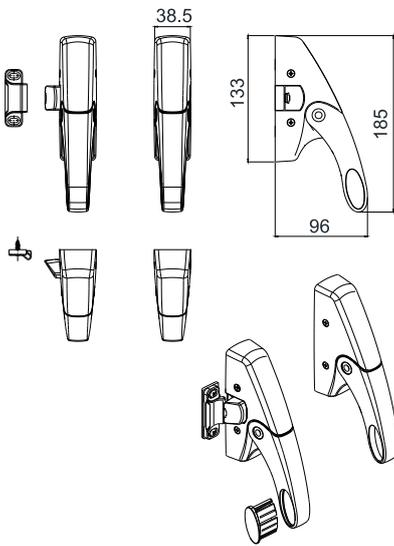


6010.702

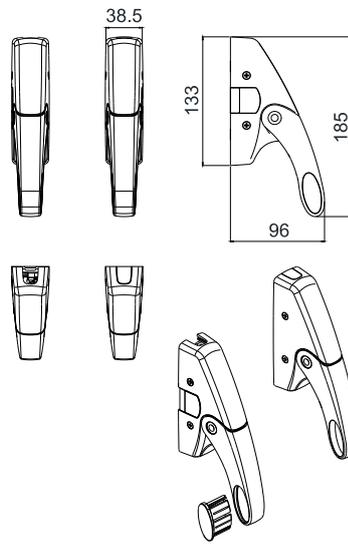

6010.703

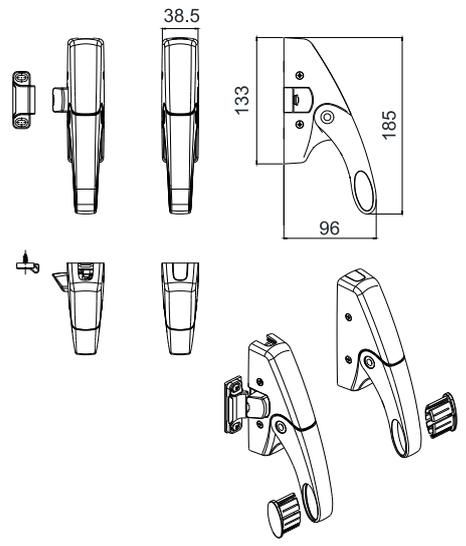


6110.712

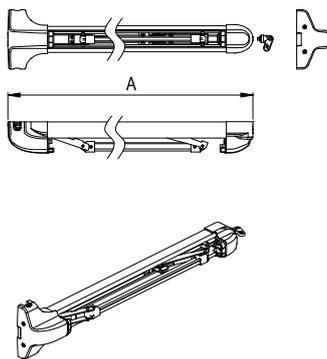


| Art. | A (mm) |
|---------------|--------|
| 6110.712/1200 | 1200 |
| 6110.712/1500 | 1500 |

6110.713

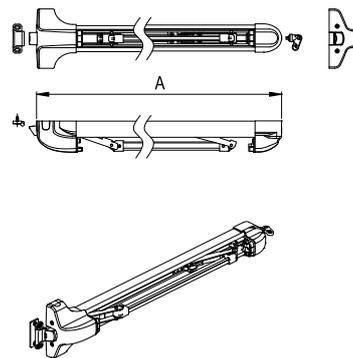


| Art. | A (mm) |
|---------------|--------|
| 6110.713/1200 | 1200 |
| 6110.713/1500 | 1500 |


6010.730




6010.735R



6010.735L




6010.740




External access


6010.870

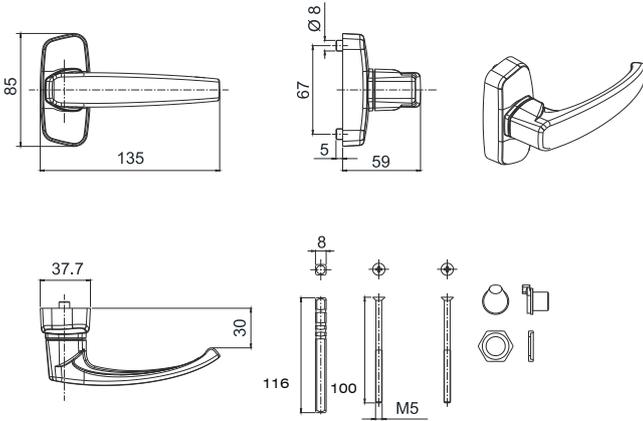


6010.873 - 6010.874

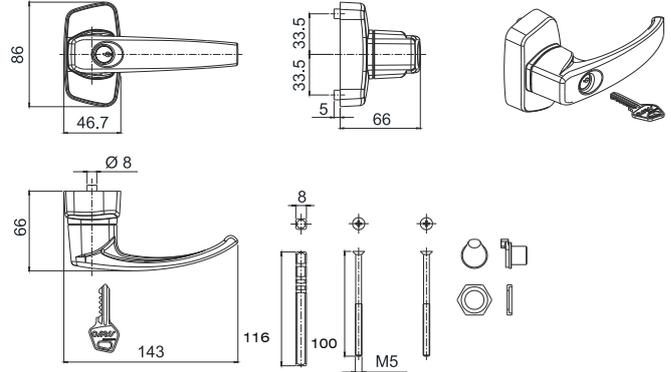


6010.890

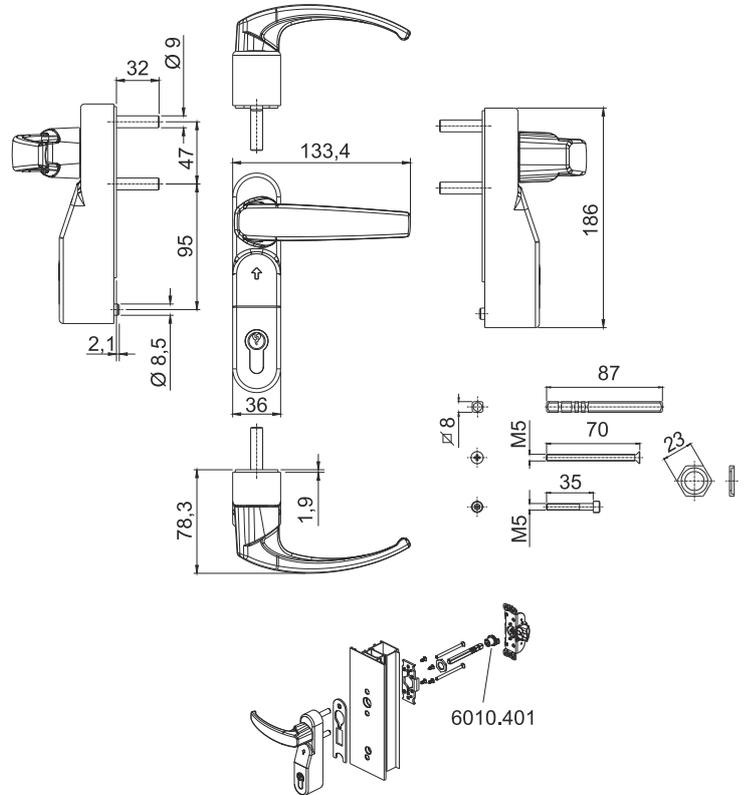


6010.875 - 6010.876 - 6010.877

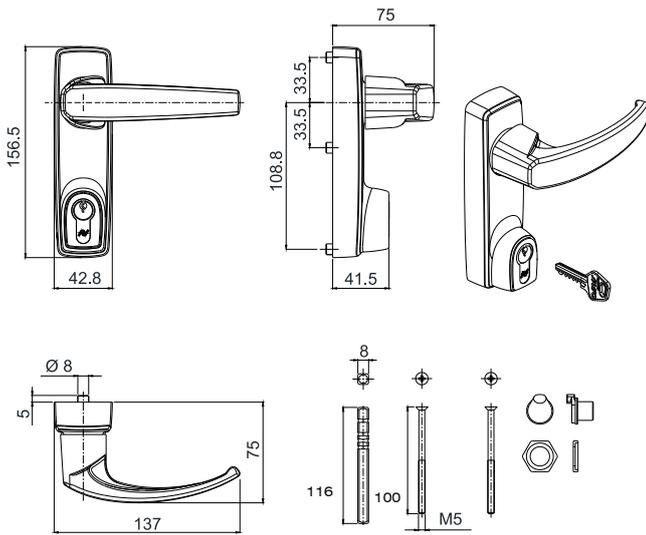

6000.879

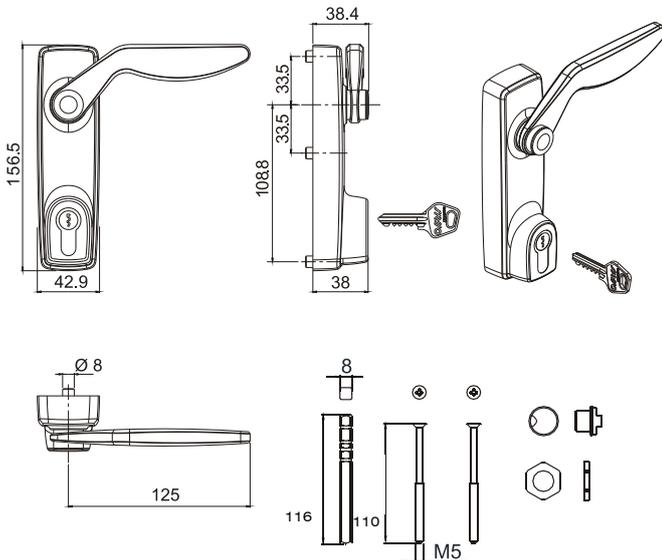


6000.880

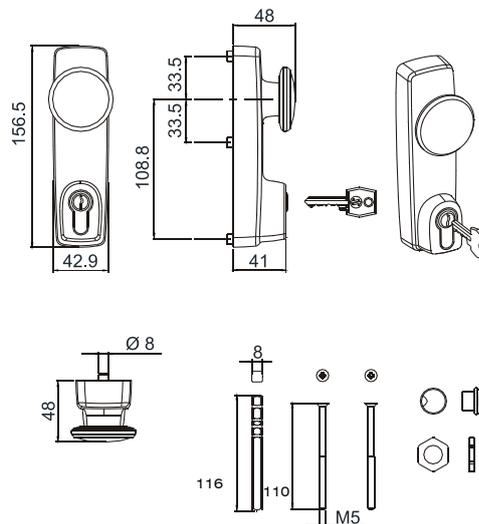

6010.401

Legend:

JUVARRA alternative configurations

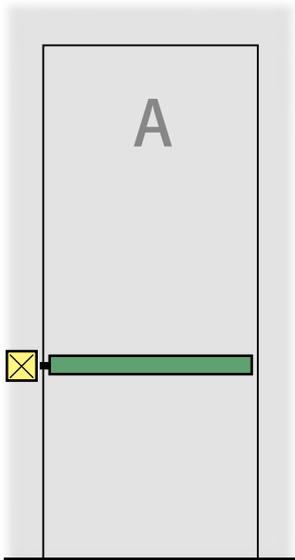


Application A:

JUVARRA
6010.1/1200

6010.701 + 6010.B


6010.703 + 6010.B

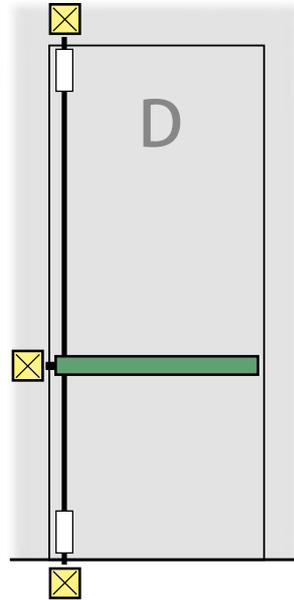

Application D:

JUVARRA


6010.703 + 6010.B
+ 6010.720/.721 +
6010.730

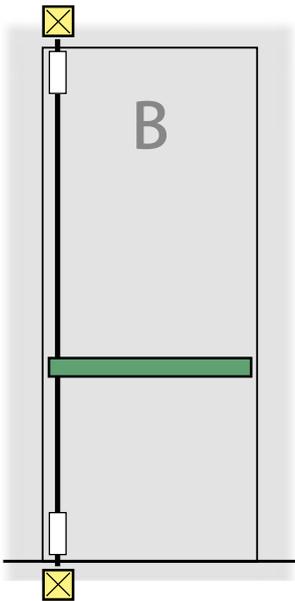

Application B:

JUVARRA
6010.2/1200


6010.702 + 6010.B
+ 6010.720/.721 +
6010.730

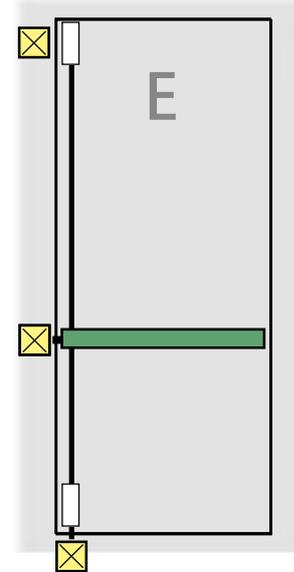

Application F:

JUVARRA

6010.703 + 6010.B
+ 6010.720/.721 +
6010.735R/L

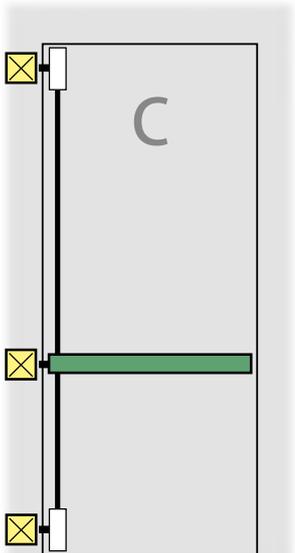

Application C:

JUVARRA
6010.3/1200

6010.703 + 6010.B
+ 6010.720/.721 +
6010.740

Certified application schemes on two leaf doors

Legend:

JUVARRA alternative configurations

Application G:


G1 JUVARRA

6010.1/1200
6010.701 + 6010.B

6010.703 + 6010.B

G2 JUVARRA

6010.2/1200
6010.702 + 6010.B + 6010.720/.721 + 6010.730

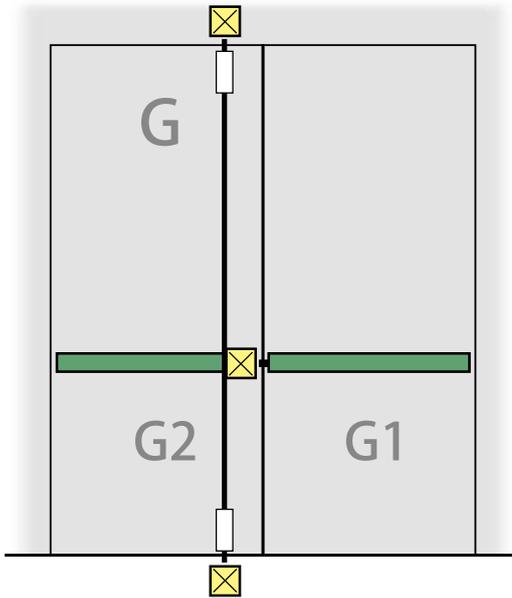


Application H:

H1 JUVARRA

6010.3/1200
6010.703 + 6010.B + 6010.720/.721 + 6000.740

H2 JUVARRA


6010.2/1200
6010.702 + 6010.B + 6010.720/.721 + 6010.730

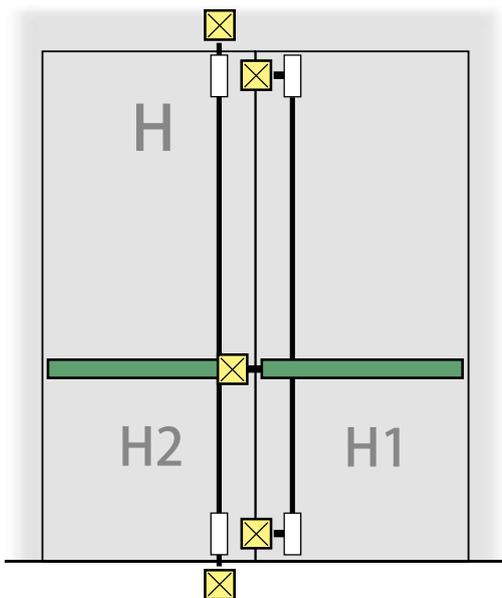

Certified application schemes for single door

Legend:


Configurazioni alternative BRUNELLESCHI

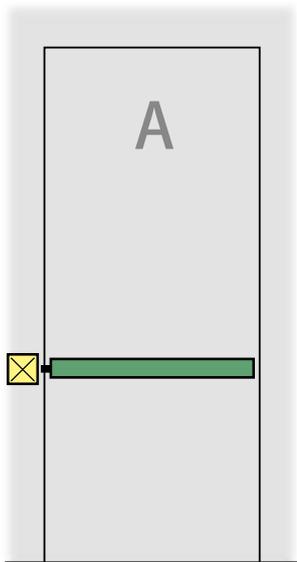

Application A:

BRUNELLESCHI


6110.713 + 6110.B

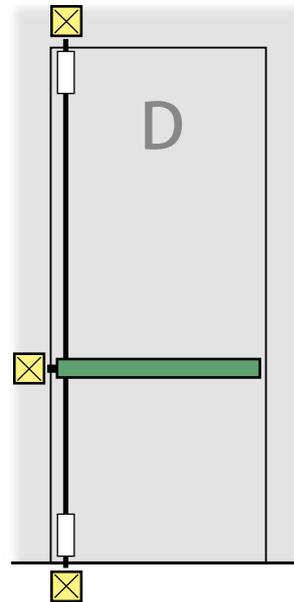

Application D:

BRUNELLESCHI


6110.713 + 6110.B
+ 6010.720/.721 +
6010.730

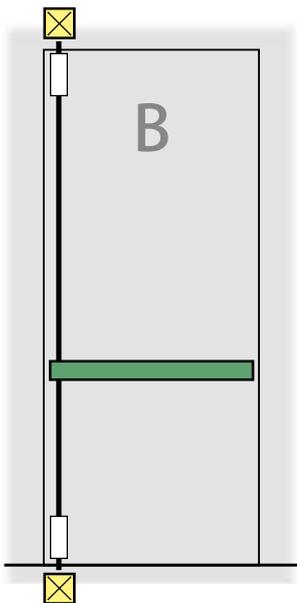

Application B:

BRUNELLESCHI


6110.712 + 6110.B +
6010.720/.721 +
6010.730

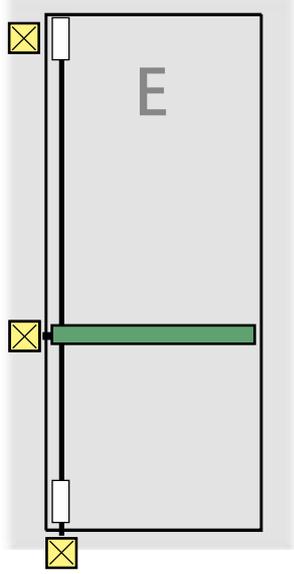

Application E:

BRUNELLESCHI


6110.713 + 6110.B +
6010.720/.721 +
6010.730 + 6010.740

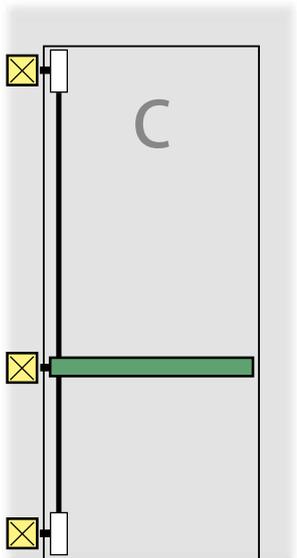

Application C:

BRUNELLESCHI

6110.713 + 6110.B +
6010.720/.721 +
6010.740

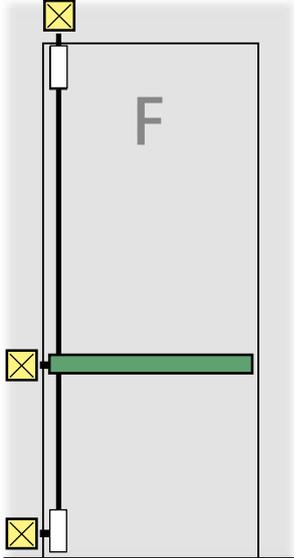

Application F:

BRUNELLESCHI

6110.713 + 6110.B +
6010.720/.721 +
6010.735R/L

Certified application schemes on two leaf doors

Legend:

BRUNELLESCHI alternative configurations


Application G:

G1 BRUNELLESCHI

6110.713 + 6110.B

G2 BRUNELLESCHI

6110.712 + 6110.B + 6010.720/.721 + 6010.730

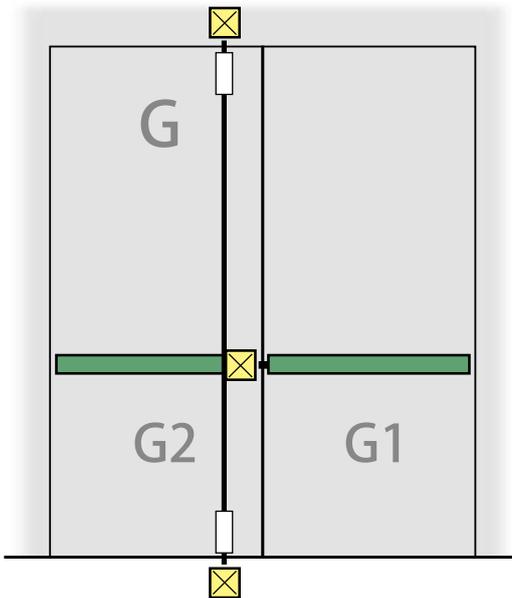


Application H:

H1 BRUNELLESCHI

6110.713 + 6110.B + 6010.720/.721 + 6010.740

H2 BRUNELLESCHI

6110.712 + 6110.B + 6010.720/.721 + 6010.730

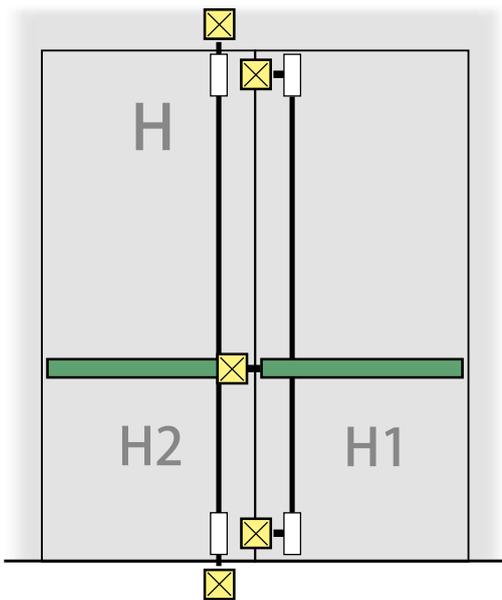

Circeo



Certified durability

Circeo has been tested according to the highest classification level of the EN 1125:2008 standard, successfully passing the 200,000-cycle endurance test.

Durable

This panic bar is mounted on sturdy steel backplates.

User-friendly

Circeo is designed to be ambidextrous and can be easily installed with simple drillings.

Universal

It is suitable for both bars and uprights, covering a wide range of profiles and materials.

Historical design


Circeo was the first panic bar and still features the historic *Luigisavio* logo.

Antibacterial safety

Savio extends its focus on safety to hygiene as well, thanks to an antibacterial treatment made with high-quality coatings, essential in public environments such as schools, hospitals, and offices.

The new GRINZ finish


The new Grinz finish combines modern elegance with lasting sturdiness. Its textured grain adds a distinctive touch to the panic bar, offering 30% more impact resistance and optimal protection against weather conditions, ensuring beauty that lasts over time. Easy to clean, it also reduces fingerprint marks, making maintenance simple and practical.

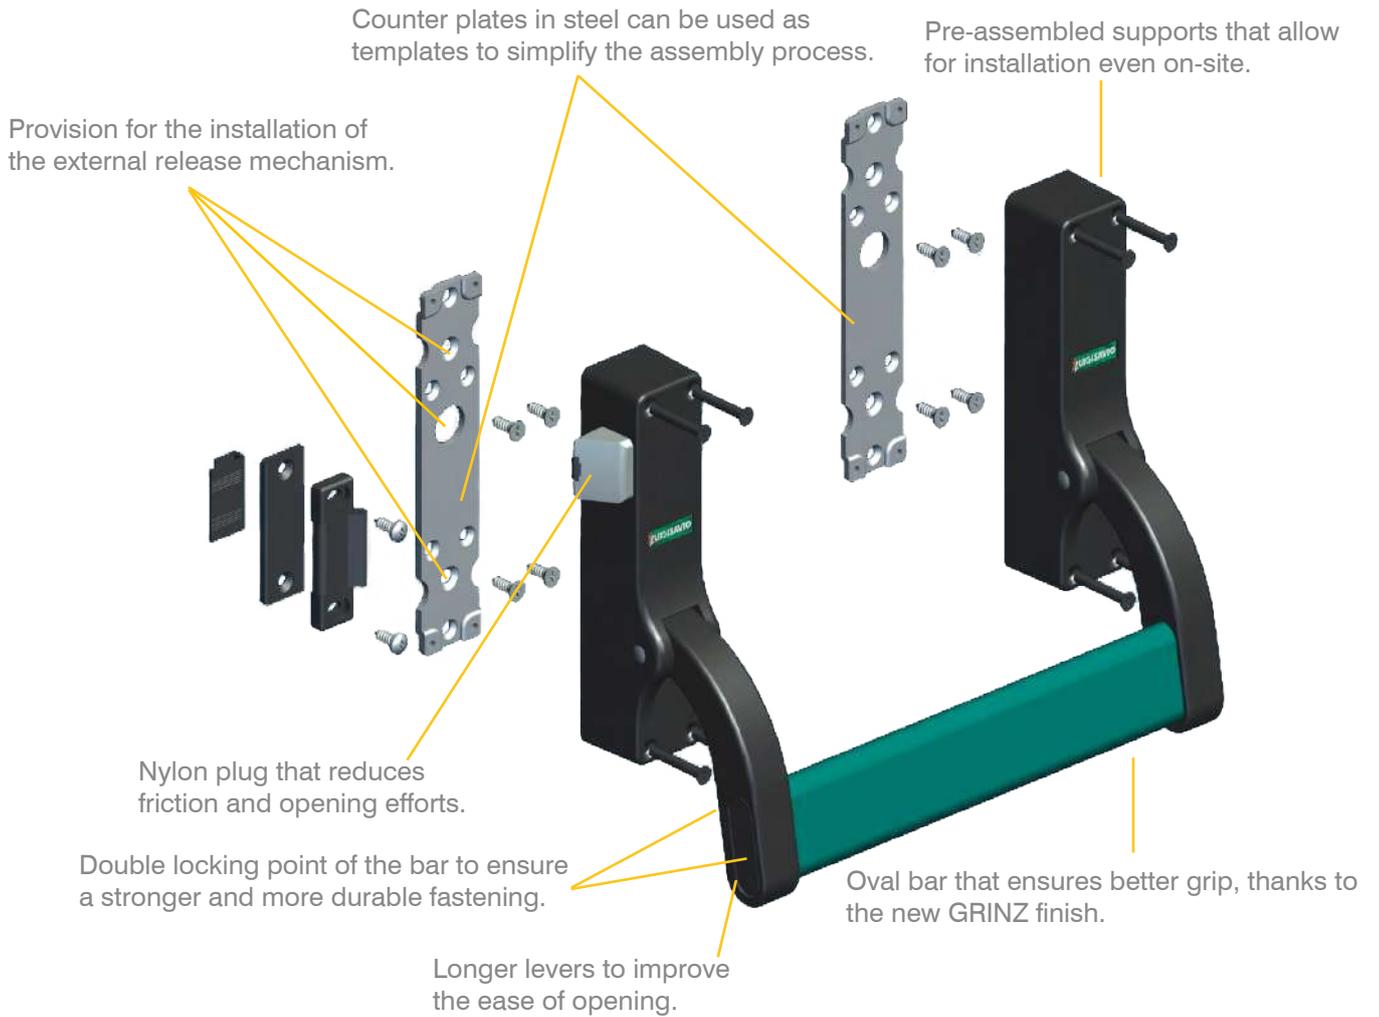

Certifications CIRCEO panic bars

CIRCEO has been tested according to the EN 1125:2008 standard, obtaining the CE certificate and the following levels indicated in bold:


3 7 6 0 1 4 2 2 A A

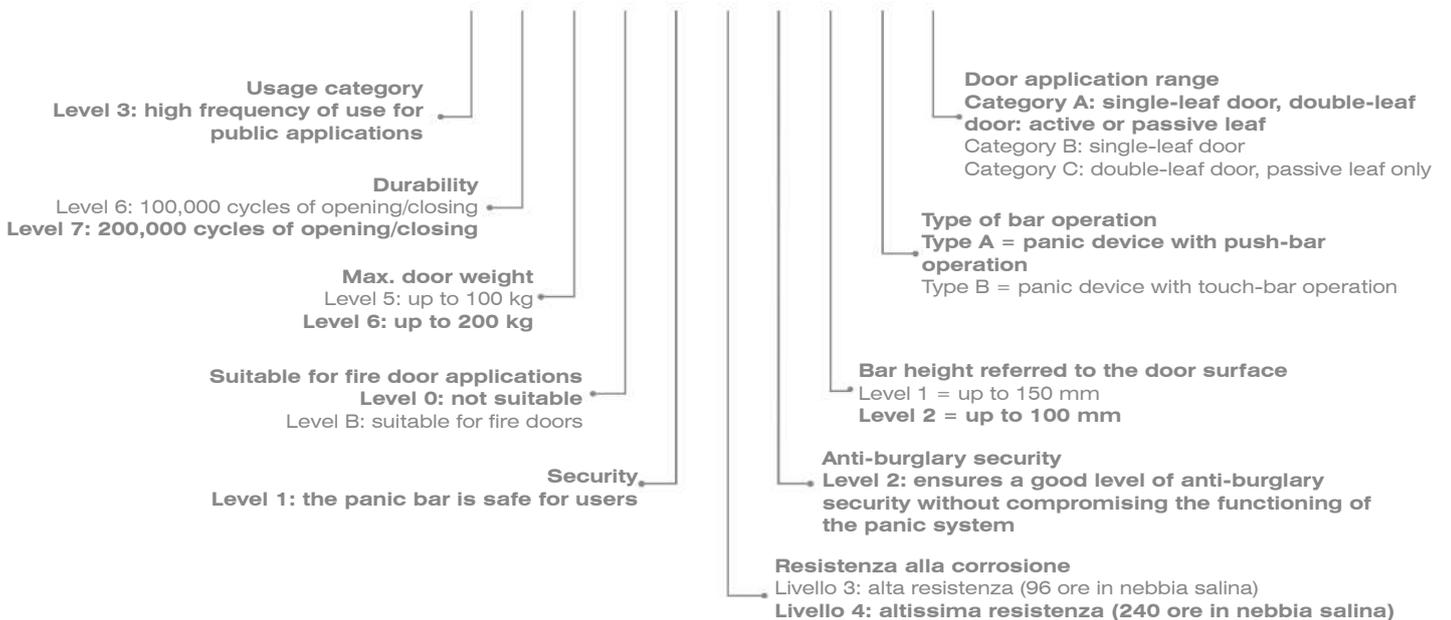

Complete kits

|  | Article | Description | Pcs. | Finishes |
|---|---------|---|------|----------|
| | KH | CIRCEO (patented) Horizontal panic bar. | 1 | |

|  | Article | Description | Pcs. | Finishes |
|---|---------|---------------------------------------|------|----------|
| | KH.2 | CIRCEO (patented) Vertical panic bar. | 1 | |

|  | Article | Description | Pcs. | Finishes |
|--|---------|---|------|----------|
| | KH.3 | CIRCEO (patented) Vertical panic bar, with side closures. | 1 | |

External access

|  | Article | Description | Pcs. | Finishes |
|---|---------|--|------|----------|
| | KH.AA | External access device, handle only, with support. | 1 | |

|  | Article | Description | Pcs. | Finishes |
|---|---------|--|------|----------|
| | KH.BB | External access device, handle and cylinder. | 1 | |
| | KH.BBU | External access device, handle and cylinder (keyed alike). | 1 | |

External access

| | Article | Description | Pcs. | Finishes |
|--|---------|---|------|----------|
| | KH.C | External access device, handle and European profile cylinder. | 1 | |
| | KH.CU | External access device, handle and European profile cylinder (keyed alike). | 1 | |
| | Article | Description | Pcs. | Finishes |
| | KH.CS | External access device, handle only, without cylinder. | 1 | |

Modular items




| | Article | Description | Pcs. | Finishes |
|--|---------|------------------------------------|------|----------|
| | KH.F | Third locking point for KH.2-KH.3. | 1 | |
| | Article | Description | Pcs. | Finishes |
| | KH.G | Electric strike for KH-KH.3. | 1 | |
| | Article | Description | Pcs. | Finishes |
| | KH.P | Pass-through for vertical rods. | 1 | |
| | Article | Description | Pcs. | Finishes |
| | KH.R | Horizontal bar of cm 150. | 1 | |

Modular items




| | | | | |
|--|-----------------------------|---|----------------------|-----------------|
|  | <p>Article</p> <p>KH.T*</p> | <p>Description</p> <p>Intermediate support.</p> <p>*This product cannot be CE marked as it exceeds the scope of application defined in the EN 1125:2008 standard.</p> | <p>Pcs.</p> <p>1</p> | <p>Finiture</p> |
|  | <p>Article</p> <p>KH.TS</p> | <p>Description</p> <p>Main support.</p> | <p>Pcs.</p> <p>1</p> | <p>Finiture</p> |
|  | <p>Article</p> <p>KH.U*</p> | <p>Description</p> <p>200 cm vertical rod.</p> <p>*This product cannot be CE marked as it exceeds the scope of application defined in the EN 1125:2008 standard.</p> | <p>Pcs.</p> <p>1</p> | <p>Finiture</p> |

Complete kits




KH

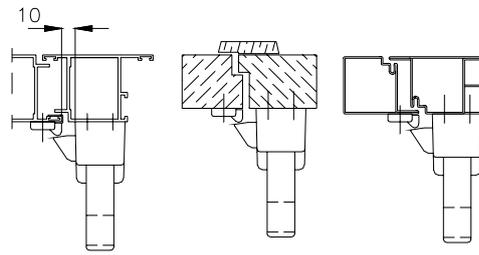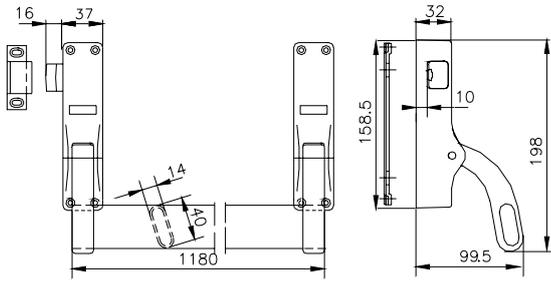

KH.2

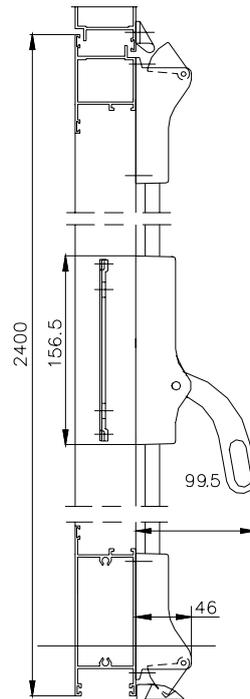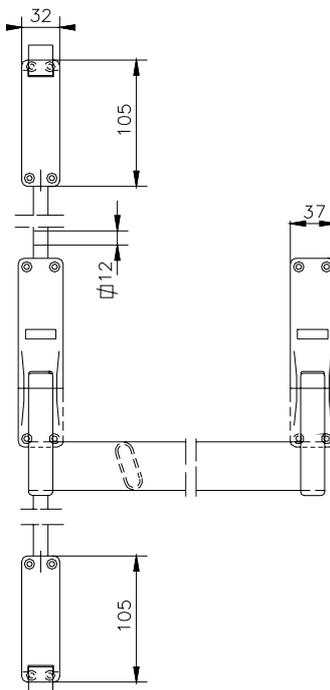


KH.3

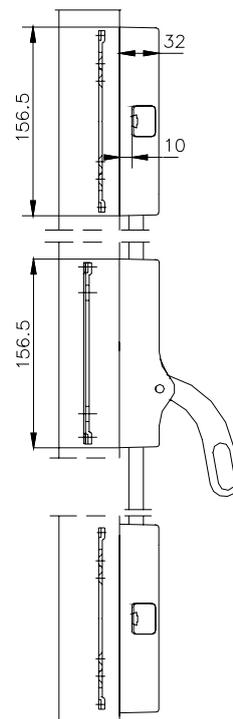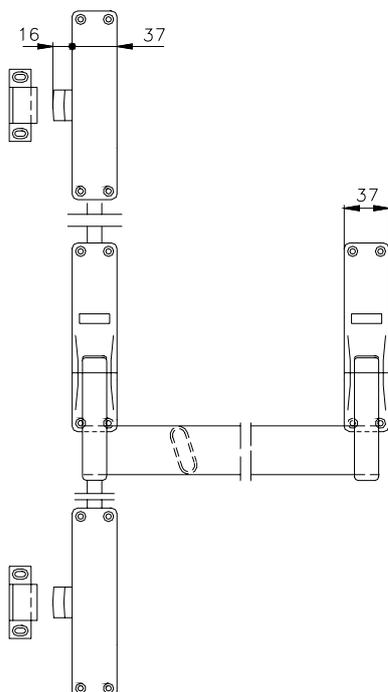


Complete kits

KH.F

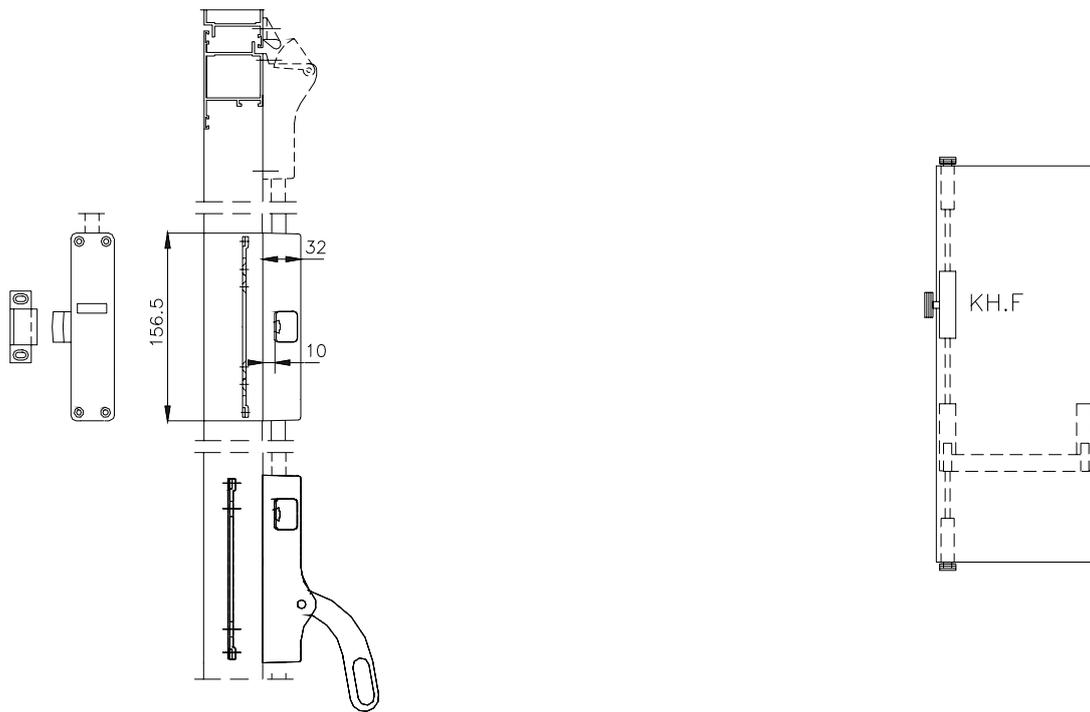

Complete kits

KH - KH.2 - KH.3

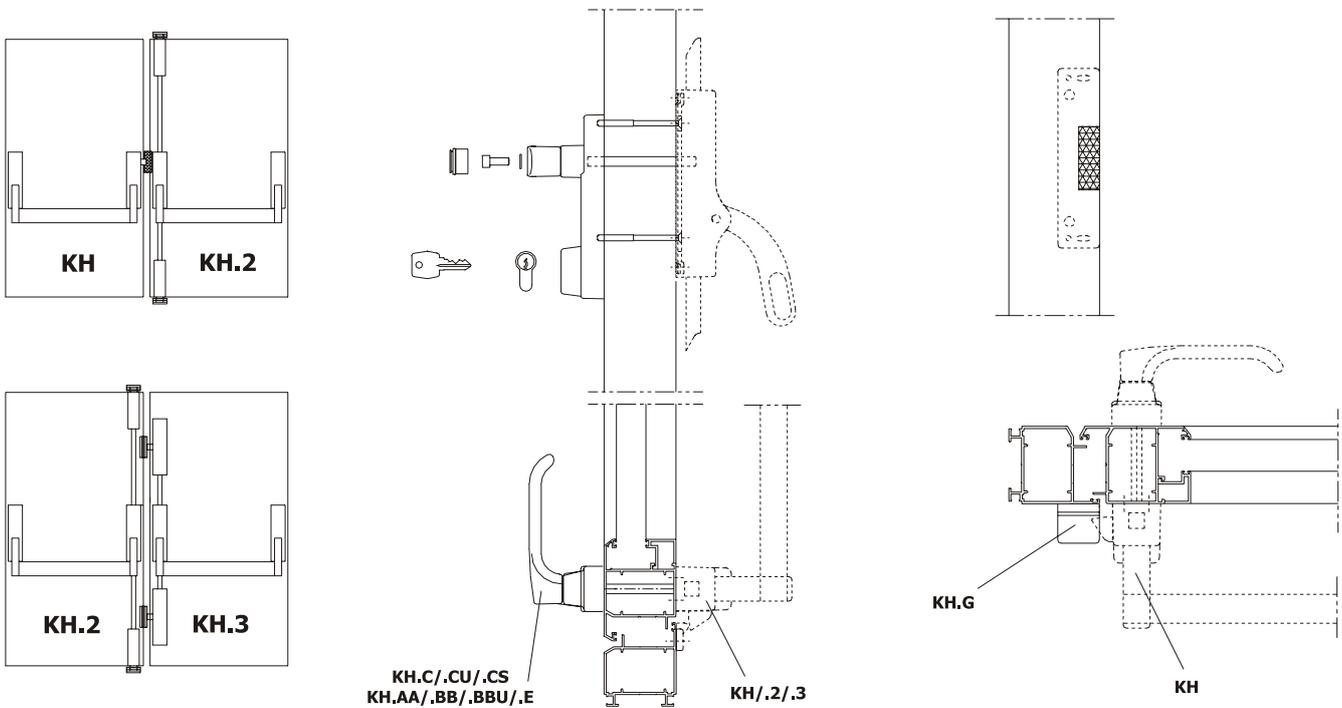

The story behind the innovation

The CIRCEO panic bar represents a milestone in Savio's history, being the first panic device developed by the company. This product not only marked Savio's entry into the safety sector but still stands out for a historic detail: it is the only item in the range that retains the original *Luigisavio* logo — a tribute to the founder, symbolising his legacy and dedication.

Luigi Savio, a master craftsman with a natural entrepreneurial spirit, founded the company in 1889 in Chiusa San Michele, near Turin. He began producing high-quality hardware, laying the foundation for what would become a leading company in the industry.

The presence of this logo on the CIRCEO panic bar not only celebrates Savio's origins, but also highlights the importance of tradition and quality that have defined the company since its founding.



Grinz finish

The new Grinz finish combines modern elegance with lasting durability. Its textured grain gives the panic bar a distinctive touch, offering 30% more impact resistance and optimal protection against weathering, for long-lasting beauty. Easy to clean, it also reduces fingerprint marks, making maintenance simple and practical.



Bernini and Cellini



Exclusive PININFARINA design

The meticulous design by Pininfarina has made it possible to create a product that enhances the aesthetics of any architectural setting.

Complete application adaptability

Thanks to the range of locking systems also available separately, Bernini and Cellini adapt to all application solutions.

Quick and easy installation

Installation is greatly simplified by the use of counter plates, allowing for application even on standard profiles and, when necessary, final assembly directly on site. The adjustable latches also enable optimal positioning in case of interference with brackets used in the profiles.

Reliability and functional safety

The high level of security against external intrusion attempts, the efficiency of the mechanisms, and the use of quality materials and finishes ensure long-lasting functional performance.

Manageable modularity

The product is available both in a complete single package and in separate, stackable packaging, allowing everyone to choose their preferred modularity.

Antibacterial safety

Savio extends its focus on safety to hygiene as well, thanks to an antibacterial treatment made with top-quality coatings, essential in public environments such as schools, hospitals, and offices.



Between design and beauty

The collaboration between Savio and Pininfarina began with the Manon handle and continues today with various Savio Group products. This partnership is based on a shared vision of the purest, Made in Italy design, where beauty and functionality merge in perfect harmony. With meticulous attention to detail, the pursuit of excellence in materials, and technological innovation, each creation is the result of exclusive craftsmanship, capable of redefining the standards of contemporary architecture.



Tested according to standard

At the laboratory, we tested the accessories from the BERNINI and CELLINI ranges following the specifications of the EN 1125:2008 standard, obtaining validation and the inclusion of these codes in the CE Declaration of Conformity (6010.B/1500, 6010.721, and 6110.B/1158). The test reached 200,000 cycles, exceeding the requirements set by the standard.

Grinz finish

The new Grinz finish combines modern elegance with lasting durability. Its textured grain adds a distinctive touch to the panic bar, offering 30% more impact resistance and optimal protection against weathering, ensuring long-lasting beauty. Easy to clean, it also reduces fingerprint marks, making maintenance simple and practical.




Certifications BERNINI and CELLINI panic bars

BERNINI and CELLINI have been tested according to the EN 1125:2008 standard, in accordance with Decree No. 92-647 of July 8, 1992, amended by Decrees No. 95-1051 of September 20, 1995, and No. 2003-947 of October 3, 2003, regarding the suitability for use of construction products, and Article 14(1)(b) of Regulation (EU) No. 305/2011 of the European Parliament and Council, dated March 9, 2011, by the certification institute ICIM, which is authorized at the European level to grant the CE mark for construction products. Its identification number is 0425.




The achievable levels are:
(in bold, the levels of BERNINI)

3 7 7 0 1 4 2 2 A A

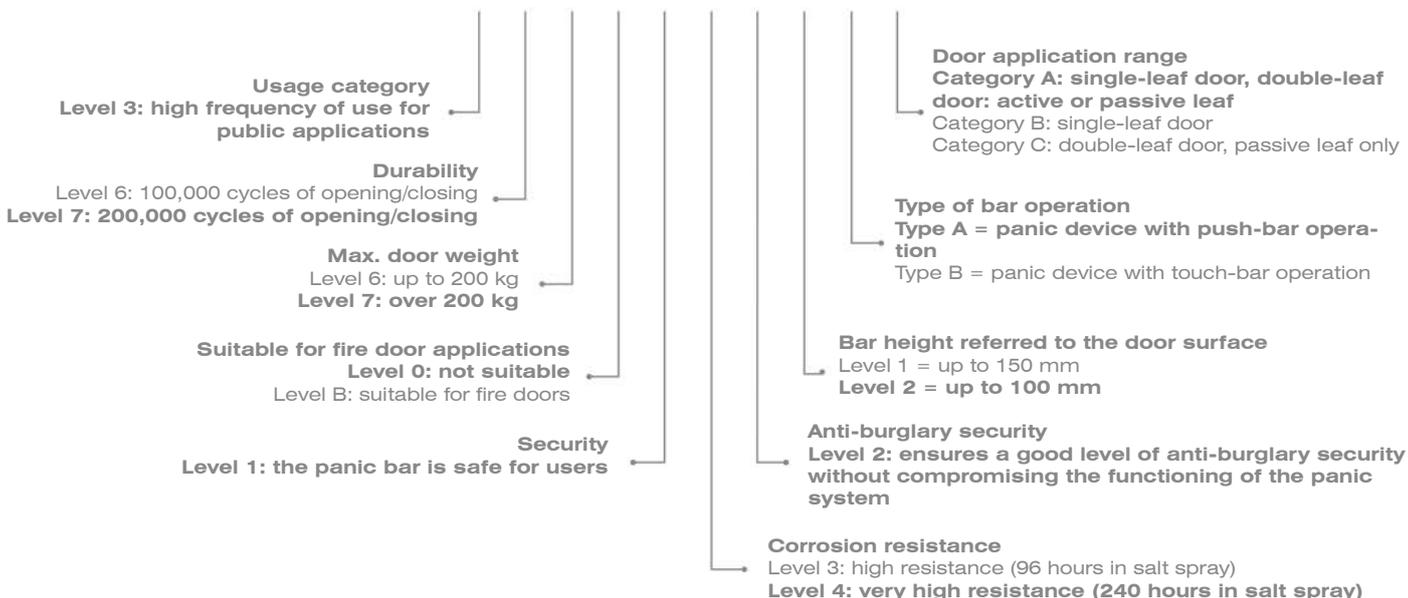


I prodotti riportati nel certificato garantiscono un alto numero di cicli di utilizzo (200.000 cicli) che permettono un uso frequente. Questa prestazione ciclica è stata ottenuta su una porta di peso pari a 300 Kg. Questi dati, uniti ad altri importanti elementi che permettono di valutare il livello prestazionale del prodotto, sono esposti qui di seguito.

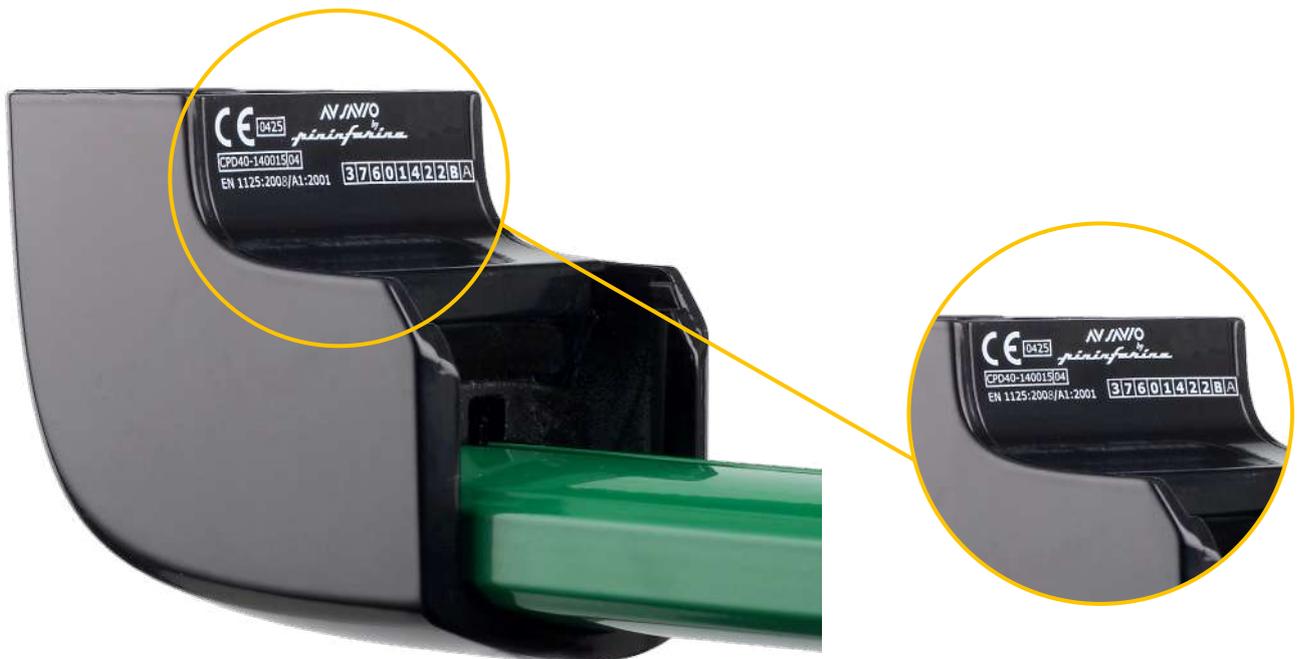

The achievable levels are:
(in bold, the levels of CELLINI)


3 7 7 0 1 4 2 2 B A

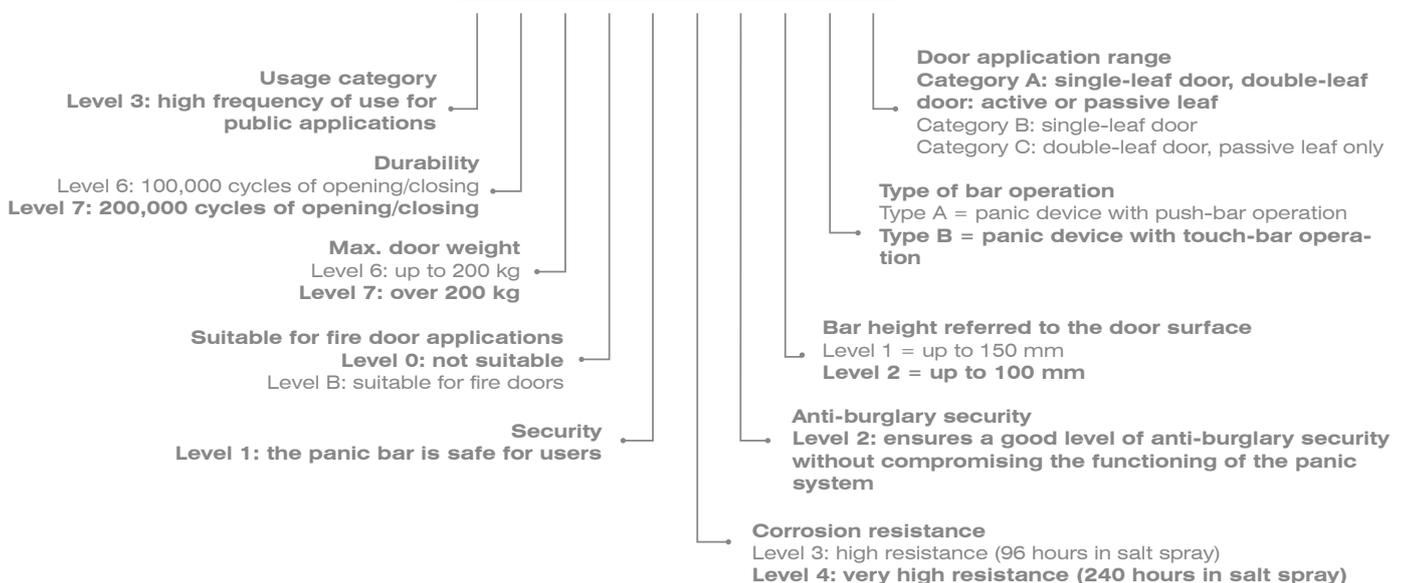


BERNINI lever panic bar




Horizontal non-handed panic bar with one closing point.

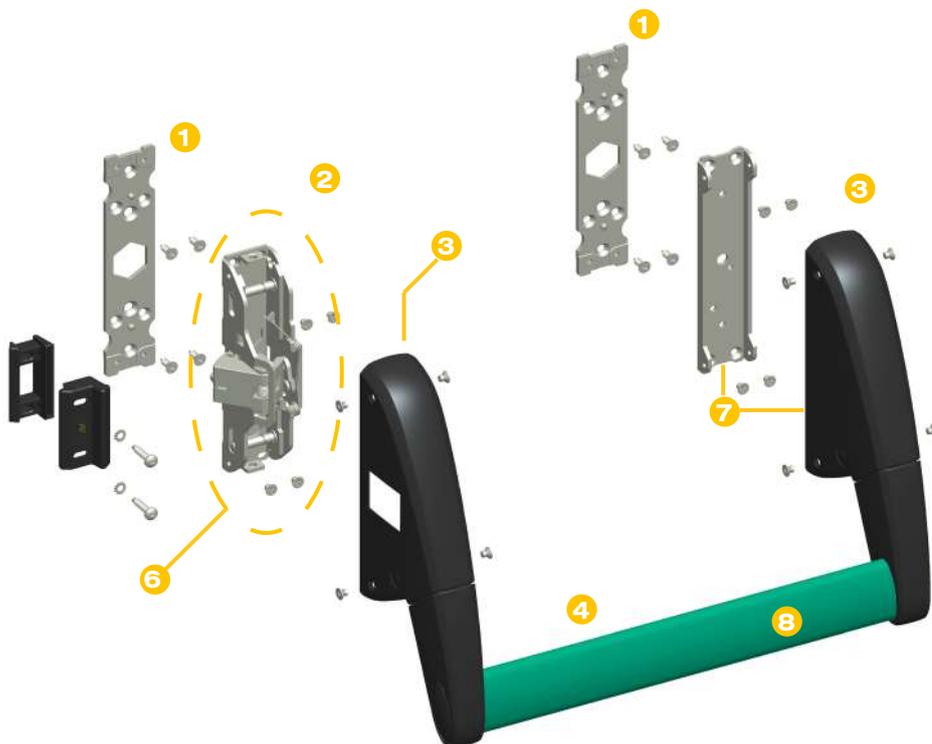

Vertical non-handed panic bar with two closing points.

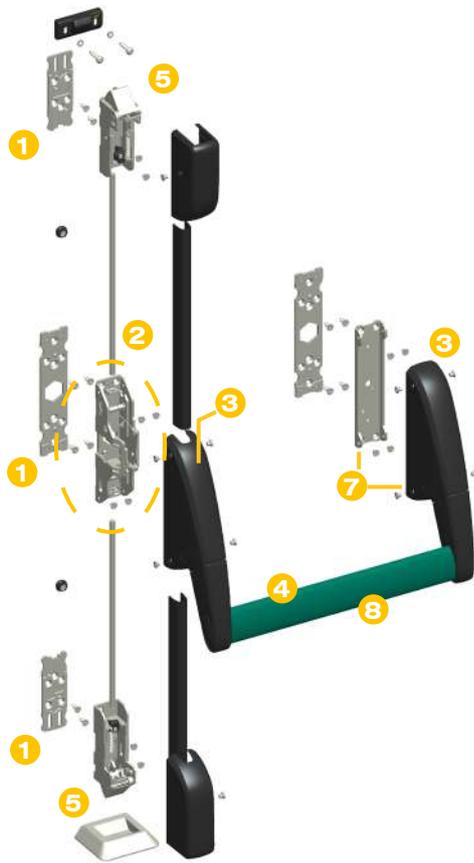

Vertical non-handed panic bar with side closures and three closing points.

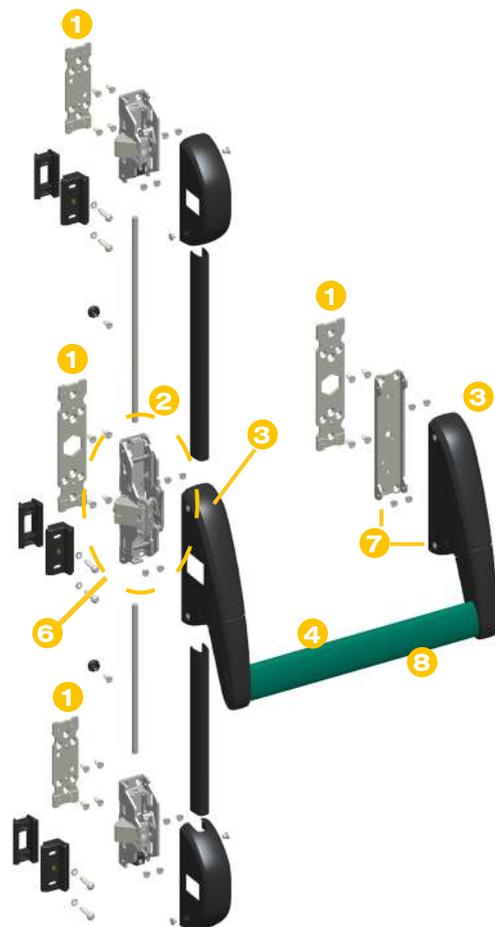


- 1 The main supports and latches are screwed onto steel counter plates (also weldable) for easy, solid, and quick fastening
- 2 Fully reversible mechanism
- 3 Compact dimensions (38 mm) for installation even on standard profiles
- 4 Wide-profile horizontal bars for improved maneuverability
- 5 Adjustable top and bottom latches with anti-burglary device
- 6 Central latch with anti-burglary device
- 7 Secondary support designed to accommodate the hold-open device and microswitch
- 8 Insertable horizontal bar with wide machining tolerances; made of steel with an oval section of 40 mm


CELLINI push panic bar




Horizontal non-handed panic bar with one closing point.

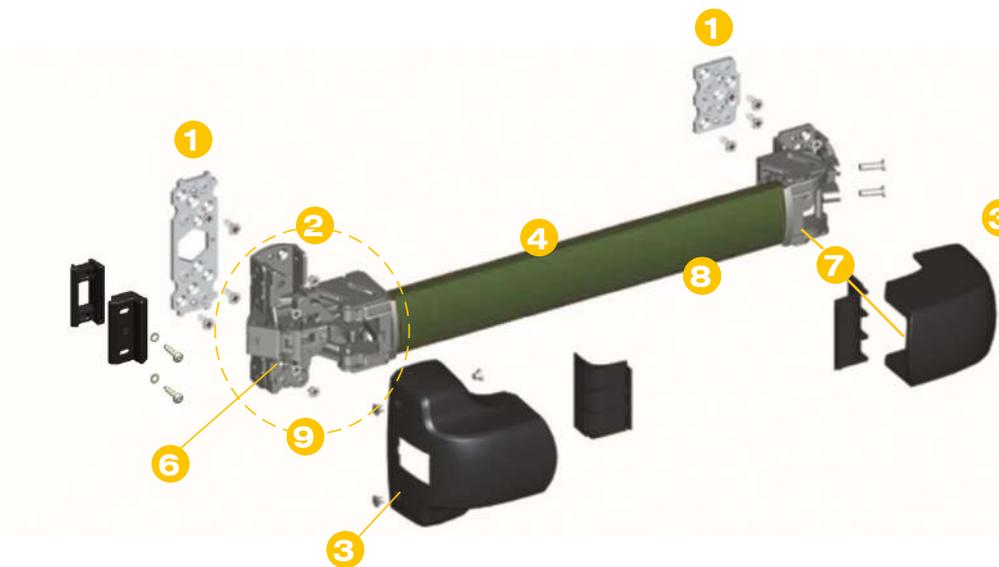

Vertical non-handed panic bar with two closing points.

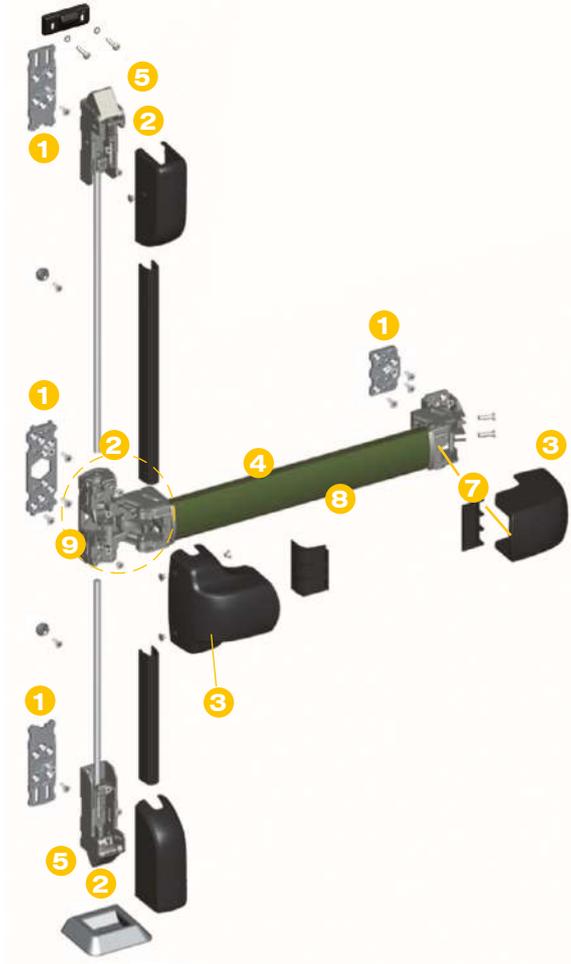

Vertical non-handed panic bar with side closures and three closing points.

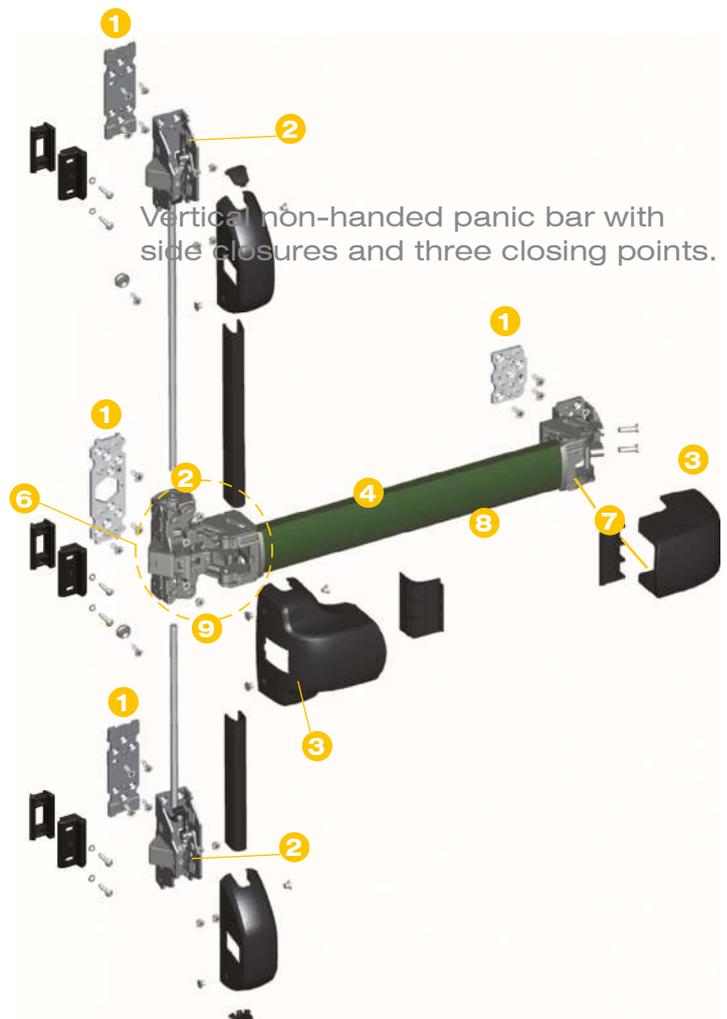

- 1 The main supports and latches are screwed onto steel counterplates (also weldable) for easy, solid, and quick fastening
- 2 Fully reversible mechanism
- 3 Reduced dimensions (38 mm) for installation on standard profiles
- 4 Wide-profile horizontal bars for improved maneuverability and grip
- 5 Adjustable top and bottom latches with anti-burglary device
- 6 Central latch with anti-burglary device
- 7 Secondary support designed for the insertion of the hold-open device and microswitch
- 8 Grip horizontal bar to facilitate door closure; made in a single piece for easier and faster cutting - made of aluminum, with wide cutting tolerance
- 9 Roller-based movement for smoother operation

CELLINI complete kits

|  | Article | Description | Pcs. | Finishes |
|---|-------------|--|------|--------------------------|
| | 6100.1/1085 | CELLINI (patented) Horizontal panic bar - 1-point closing, push version. | 1 | GR 301, GR 629, XVM, XVS |

|  | Article | Description | Pcs. | Finishes |
|--|-------------|--|------|--------------------------|
| | 6100.2/1085 | CELLINI (patented) Vertical panic bar - 2-point closing, push version. | 1 | GR 301, GR 629, XVM, XVS |

|  | Article | Description | Pcs. | Finishes |
|---|-------------|--|------|--------------------------|
| | 6100.3/1085 | CELLINI (patented) Vertical panic bar - 3 lateral point closing, push version. | 1 | GR 301, GR 629, XVM, XVS |

CELLINI modular items

| | | | | |
|---------------------------------------|---|--|---|---|
| | <p>Article 6100.701</p> | <p>Description (patented) Horizontal support kit - 1-point closing, push version.</p> | <p>Pcs. 1</p> | <p>Finishes 9010, GR 905, GREY, SILV</p> |
| | <p>Article 6100.702</p> | <p>Description (patented) Vertical support kit - 2-point closing, push version.</p> | <p>Pcs. 1</p> | <p>Finishes 1013, 9010, GR 905, GREY, SILV</p> |
| | <p>Article 6100.703</p> | <p>Description (patented) Support kit - 3-point closing, push version.</p> | <p>Pcs. 1</p> | <p>Finishes 1013, 9010, GR 905, GREY, SILV</p> |
| | <p>Article 6100.B/1085</p> | <p>Description 1085 mm horizontal bar.</p> | <p>Pcs. 1</p> | <p>Finishes 1013, 9010, GR 301, GR 629, GR 905, C, GREY, SILV, XSD, XVM, XVS</p> |
| <p>Article 6100.B/1385</p> | <p>Description 1385 mm horizontal bar.</p> | <p>Pcs. 1</p> | <p>Finishes 9010, GR 301, GR 629, GR 905, C, GREY, HL, SILV, XL, XSD, XVM, XVS</p> | |

BERNINI modular items

| | | | | |
|--|------------------------------------|---|--------------------------|---|
| | <p>Article 6000.701</p> | <p>Description (patented) Horizontal support kit - 1-point closing, lever version.</p> | <p>Pcs. 1</p> | <p>Finishes 9010, GR 905, GREY, SILV</p> |
|--|------------------------------------|---|--------------------------|---|

CELLINI modular items

| | Article | Description | Pcs. | Finishes |
|--|-------------|---|------|--|
|  | 6000.702 | (patented) Vertical support kit - 2-point closing, lever version. | 1 | 9010, GR 905, GREY, SILV |
|  | 6000.703 | (patented) Ambidextrous support kit - 3-point closing, lever version. | 1 | 9010, GR 905, GREY, SILV |
|  | 6010.B/860 | 860 mm horizontal bar. | 1 | 910, GR 629, GR 301, GR 905, SLV, GREY, XVM, XVS |
| | 6010.B/1200 | 1200 mm horizontal bar. | | |
| | 6010.B/1300 | 1500 mm horizontal bar. | | |

BERNINI and CELLINI modular items

| | Article | Description | Pcs. | Finishes |
|---|----------|--|------|--------------------------------|
|  | 6000.720 | Standard vertical rods for doors up to 2550mm in height. | 1 | 1013, 9010, GR 905, GREY, SILV |
|  | 6000.721 | Vertical rods for doors up to 3100mm in height. | 1 | 1013, 9010, GR 905, GREY, SILV |

BERNINI and CELLINI modular items

|  | Article | Description | Pcs. | Finishes |
|---|----------|--------------------------------|------|--------------------------------|
| | 6000.730 | (patented) high-low latch kit. | 1 | 1013, 9010, GR 905, GREY, SILV |
|  | Article | Description | Pcs. | Finishes |
| | 6000.740 | (patented) lateral latch kit. | 1 | 1013, 9010, GR 905, GREY, SILV |

BERNINI PUSH PAD range (compliant with EN 179:2008 standard)


|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|--------------------------|
| | 6000.751 | (patented) horizontal closing support, PUSH PAD version. | 1 | 9010, GR 905, GREY |
| | 6000.752 | (patented) support for vertical-only closing, PUSH PAD version. | 1 | 9010, GR 905, GREY, SILV |

BERNINI and CELLINI external access

For the external access devices of BERNINI and CELLINI, please refer to the items on pages 13 and 14 (6010.870 - 6010.873 - 6010.874 - 6010.875 - 6010.877 - 6010.876 - 6000.879 - 6000.880).

|  | Article | Description | Pcs. | Finishes |
|---|----------|--|------|----------|
| | 6000.401 | Cam for use with the external access devices 6010.870/.873/.874/.875/.876/.877 and the BERNINI and CELLINI panic bars. | 1 | |
|  | Article | Description | Pcs. | Finishes |
| | 6000.815 | Kit for 6010.890 applications for the BERNINI panic bars. | 1 | |

BERNINI and CELLINI complementary accessories

|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|--------------------------|
| | 6000.802 | BERNINI - CELLINI Kit for horizontal or lateral closures with strike >20mm. | 5 | 9010, GR 905, GREY, SILV |
| | 6000.803 | Kit for horizontal or lateral closures with strike <20mm for PVC/wood. | 5 | |
| | 6000.804 | Kit for vertical closures with strike >20mm for PVC/wood. | 5 | |
| | 6000.805 | Kit for vertical closures with strike <20mm for PVC/wood. | 5 | |

|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|--------------------------|
| | 6000.806 | BERNINI - CELLINI 1.5 mm thickness painted steel. | 40 | 9010, GR 905, GREY, SILV |

|  | Article | Description | Pcs. | Finishes |
|--|----------|--|------|--------------------------|
| | 6000.807 | BERNINI - CELLINI kit of steel gate and spacers for vertical closures. | 20 | 9010, GR 905, GREY, SILV |

|  | Article | Description | Pcs. | Finishes |
|---|----------|---|------|--------------------------|
| | 6000.820 | BERNINI - CELLINI electric meeting with repeater. | 1 | 9010, GR 905, GREY, SILV |

CELLINI complementary accessories


|  | Article | Description | Pcs. | Finishes |
|---|----------|--------------------------|------|----------|
| | 6100.830 | CELLINI day stop device. | 5 | |

BERNINI complementary accesories


| | Article | Description | Pcs. | Finishes |
|---|----------|--|------|--------------------------|
|  | 6001.805 | BERNINI door frame for horizontal and vertical closures for applications on rebate profiles. | 20 | 9010, GR 905, GREY, SILV |
|  | 6001.806 | BERNINI thickness of 1mm in painted steel. | 40 | 9010, GR 905, GREY, SILV |

CELLINI complete kits


6010.1/1085

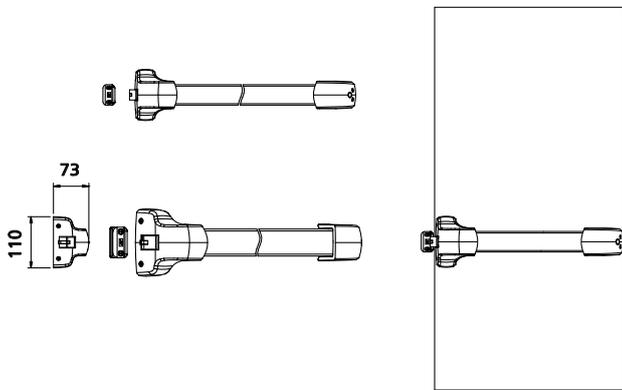

6010.2/1085

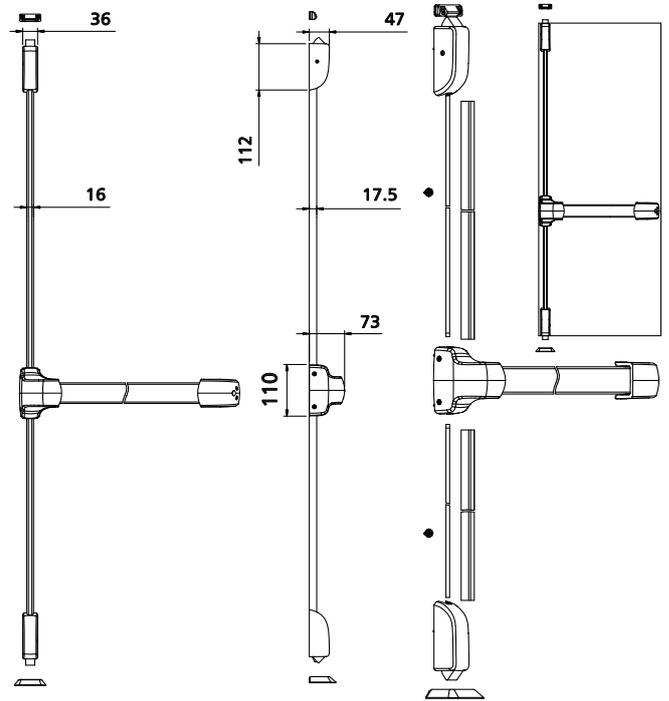


6010.3/1085

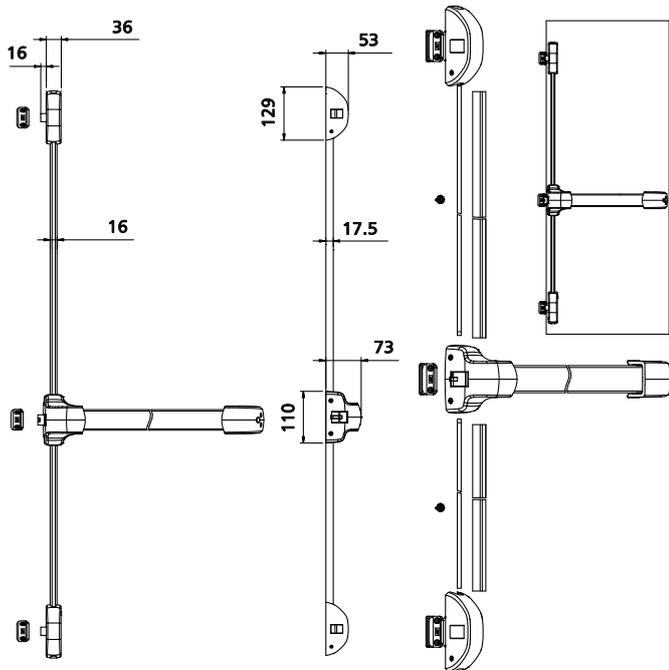


BERNINI modular items


6000.701

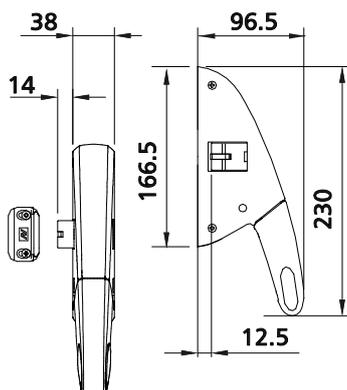


6000.702

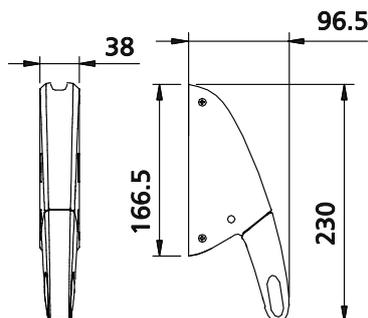


6000.703

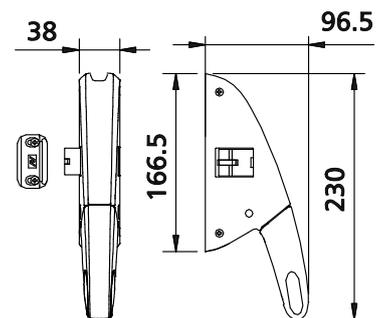


CELLINI modular items

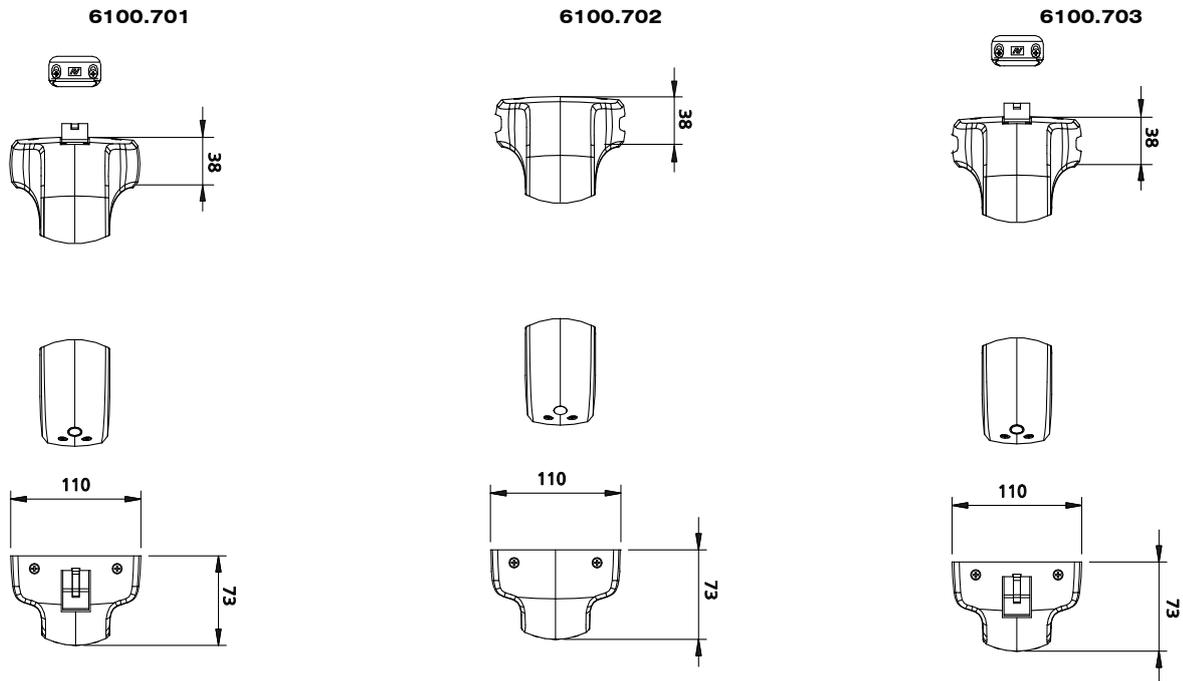

BERNINI and CELLINI modular items

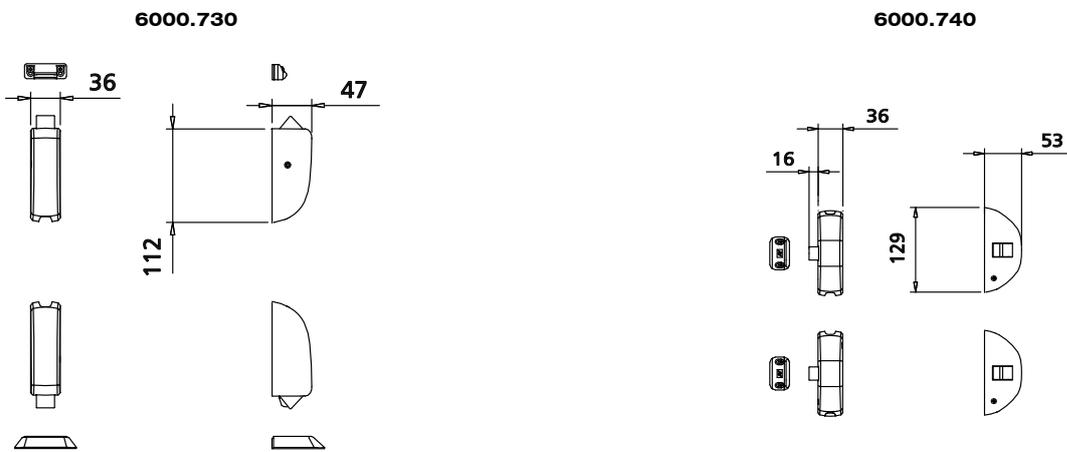


BERNINI PUSH PAD range (compliant with EN 179:2008 standard)

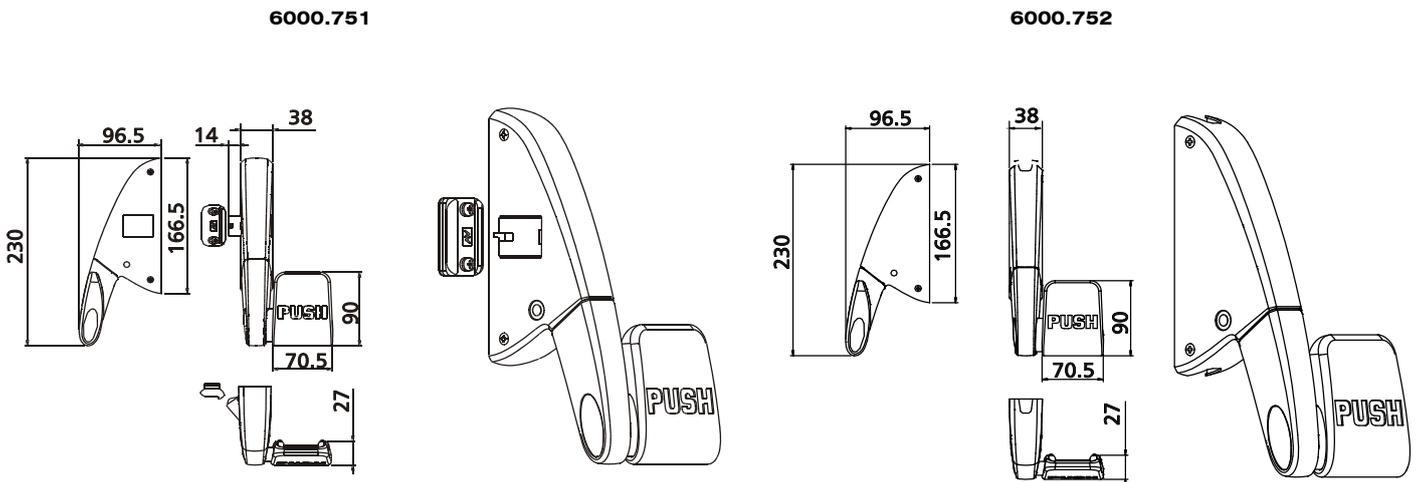



BERNINI and CELLINI external access

For the external access devices of BERNINI and CELLINI, please refer to the items on pages 13 and 14 (6010.870 - 6010.873 - 6010.874 - 6010.875 - 6010.877 - 6010.876 - 6000.879 - 6000.880).


BERNINI and CELLINI complementary accesories

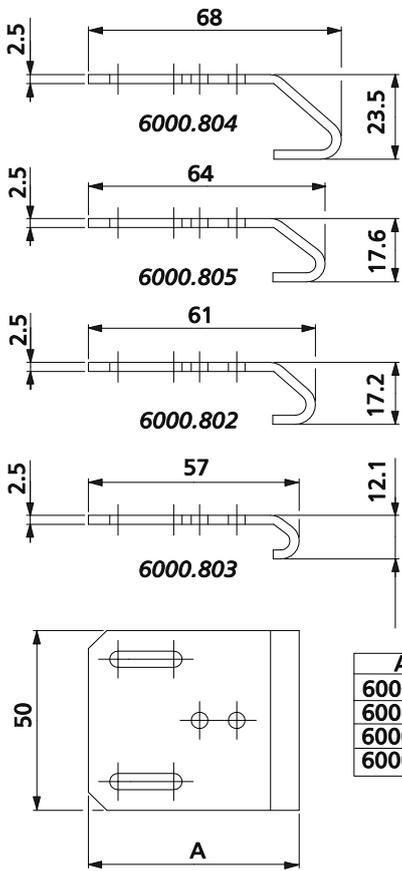


| Art. | A |
|----------|----|
| 6000.802 | 61 |
| 6000.803 | 57 |
| 6000.804 | 68 |
| 6000.805 | 64 |




6000.820

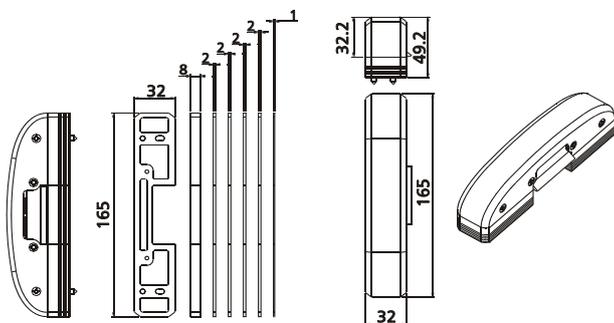


6000.807

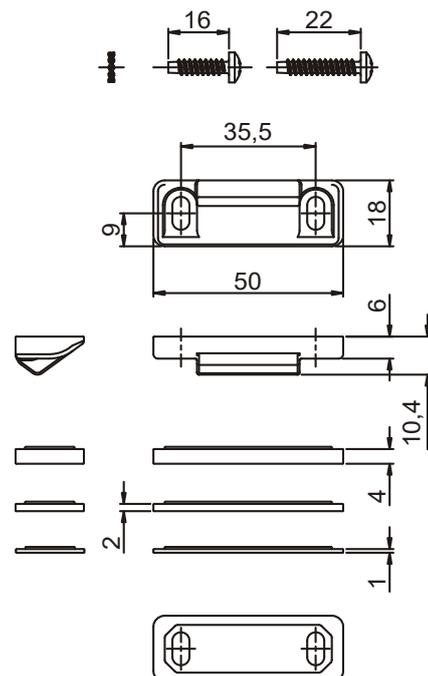

6001.805

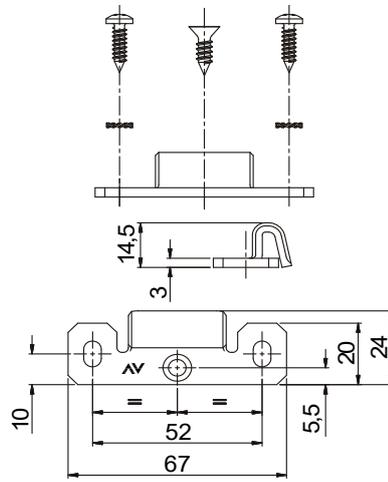


6001.806

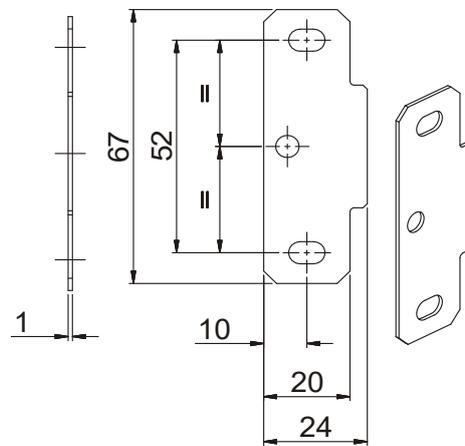

Certified application schemes for single door

Legend:
 BERNINI alternative configurations

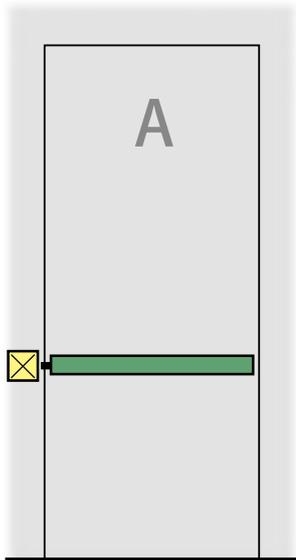


Application A:

BERNINI

6000.701 +
6010.B


6000.703 +
6010.B

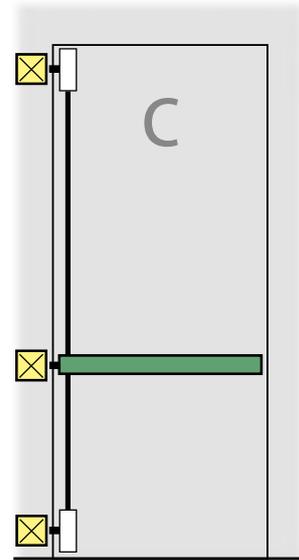

Application C:

BERNINI

6000.703 +
6010.B +
6000.720/.721 +
6000.740

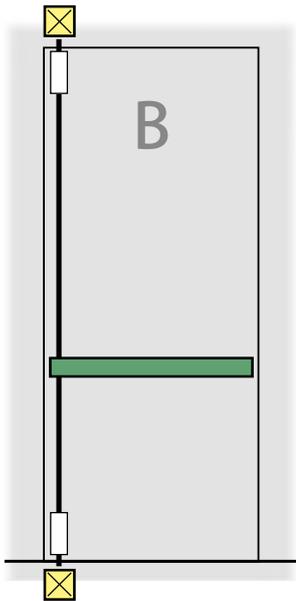


Application B:

BERNINI

6000.702 +
6010.B +
6000.720/.721 +
6000.730

6000.703 +
6010.B +
6000.720/.721 +
6000.730

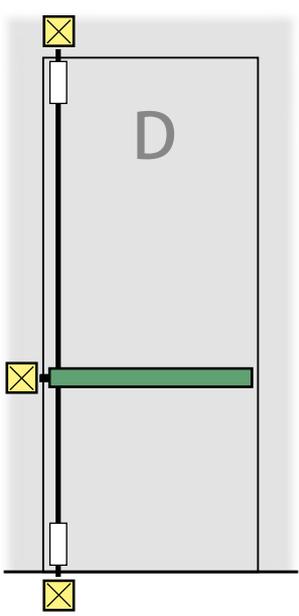

Application D:

BERNINI

6000.703 +
6010.B +
6000.720/.721 +
6000.730

Certified application schemes on two leaf doors

Legend:

Configurazioni alternative BERNINI

Application G:

G1 BERNINI


6000.701 + 6010.B

6000.703 + 6010.B

G2 BERNINI

6000.702 + 6010.B + 6000.720/.721 + 6000.730

6000.703 + 6010.B + 6000.720/.721 + 6000.730

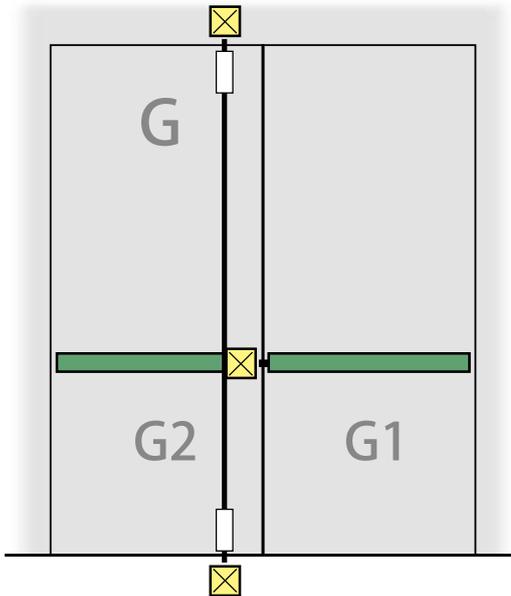

Application H:


H1 BERNINI

6000.703 + 6010.B + 6000.720/.721 + 6000.740

H2 BERNINI

6000.702 + 6010.B + 6000.720/.721 + 6000.730


6000.703 + 6010.B + 6000.720/.721 + 6000.730

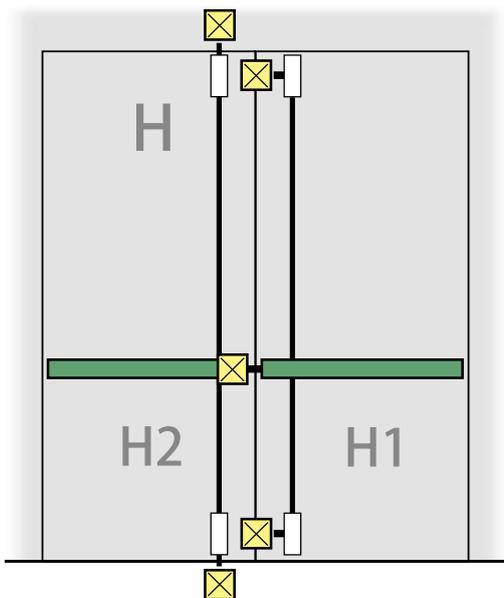

Certified application schemes for single door

Legend:

CELLINI alternative configurations

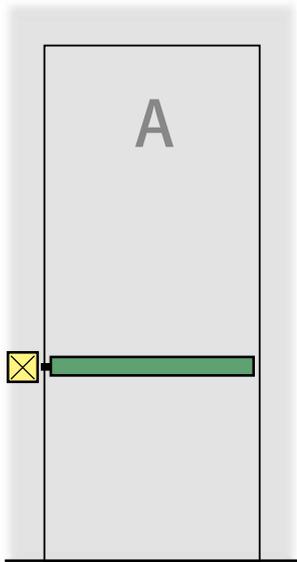


Application A:

CELLINI

6100.1/1085

6100.701 + 6100.B
6100.703 + 6100.B

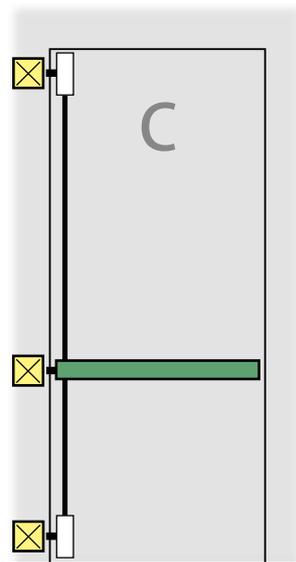


Application C:

CELLINI

6100.3/1085

6100.703 + 6100.B +
6000.720/.721 +
6000.740

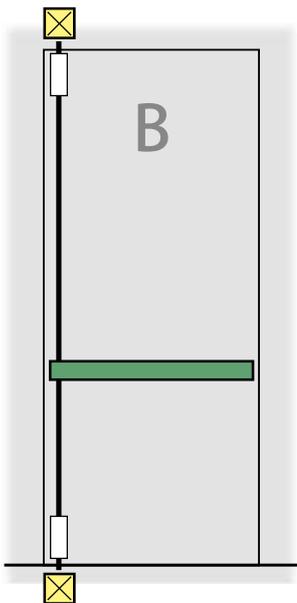


Application B:

CELLINI

6100.2/1085

6100.702 + 6100.B +
6000.720/.721 + 6000.730

6100.703 + 6100.B
6000.720/.721 + 6000.730

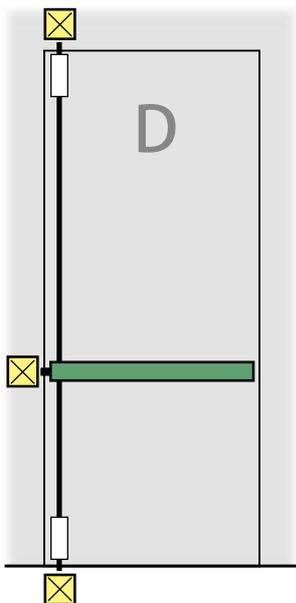

Application D:

CELLINI

6100.703 + 6100.B +
6000.720/.721 + 6000.730

Certified application schemes on two leaf doors

Legend:

CELLINI alternative configurations

Application G:

G1 CELLINI

6100.1/1085

6100.701 + 6100.B


6100.703 + 6100.B

G2 CELLINI

6100.2/1085

6100.702 + 6100.B + 6000.720/.721 + 6000.730

6100.703 + 6100.B + 6000.720/.721 + 6000.730

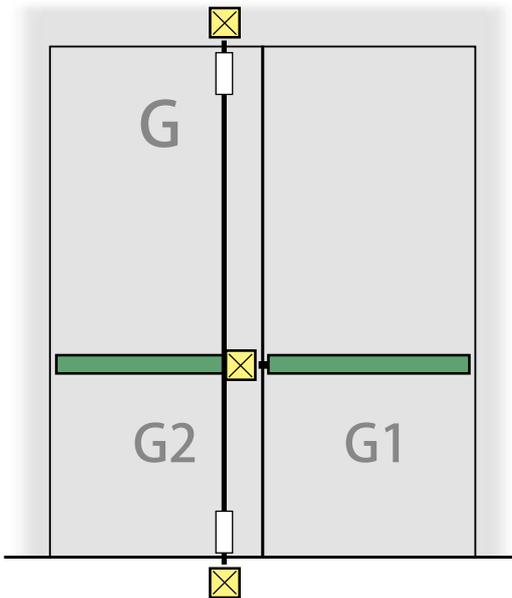

Application H:

H1 CELLINI

6100.3/1085


6100.703 + 6100.B + 6000.720/.721 + 6000.740

H2 CELLINI

6100.2/1085

6100.702 + 6100.B + 6000.720/.721 + 6000.730

6100.703 + 6100.B + 6000.720/.721 + 6000.730

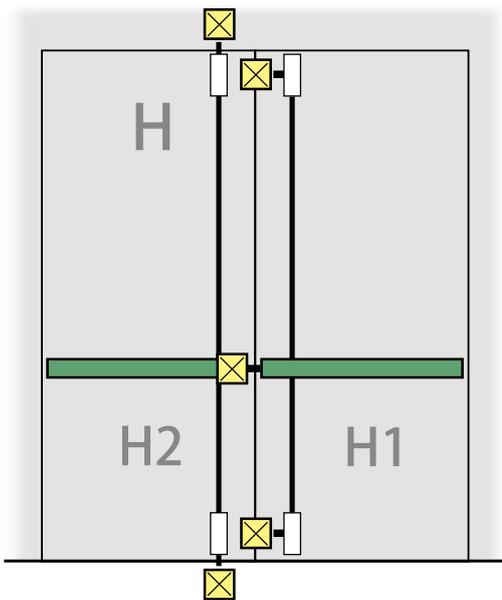



Savio S.p.A.

Via Torino, 25 - 10050 Chiusa di San Michele (TO)
Tel. +39 011 964 34 64 - info@savio.it
www.savio.it